
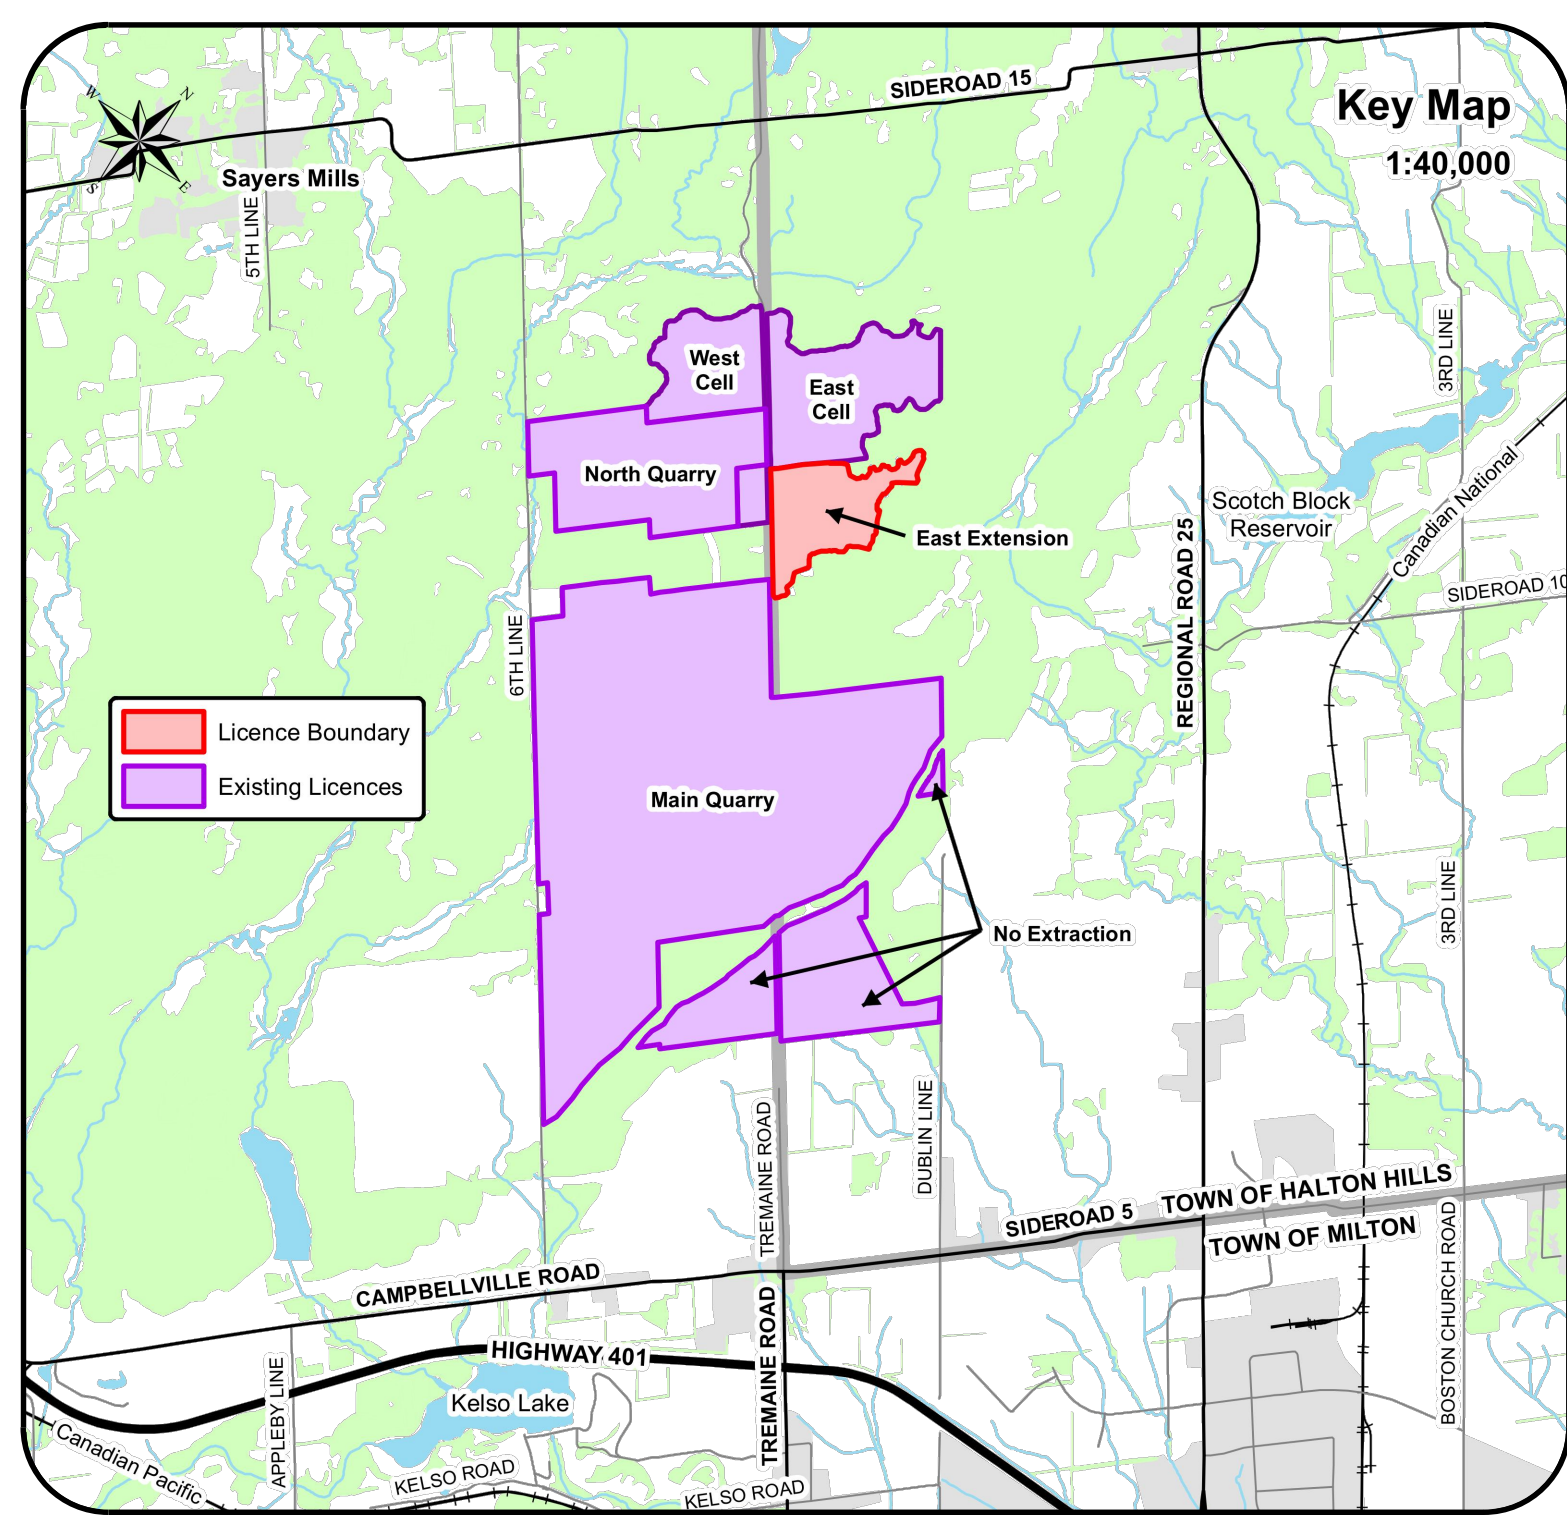


**Section A-A1**  
1:2000 Horizontal  
1:1000 Vertical


**Section B-B1**  
1:2000 Horizontal  
1:1000 Vertical

**Section C-C1**  
1:2000 Horizontal  
1:1000 Vertical

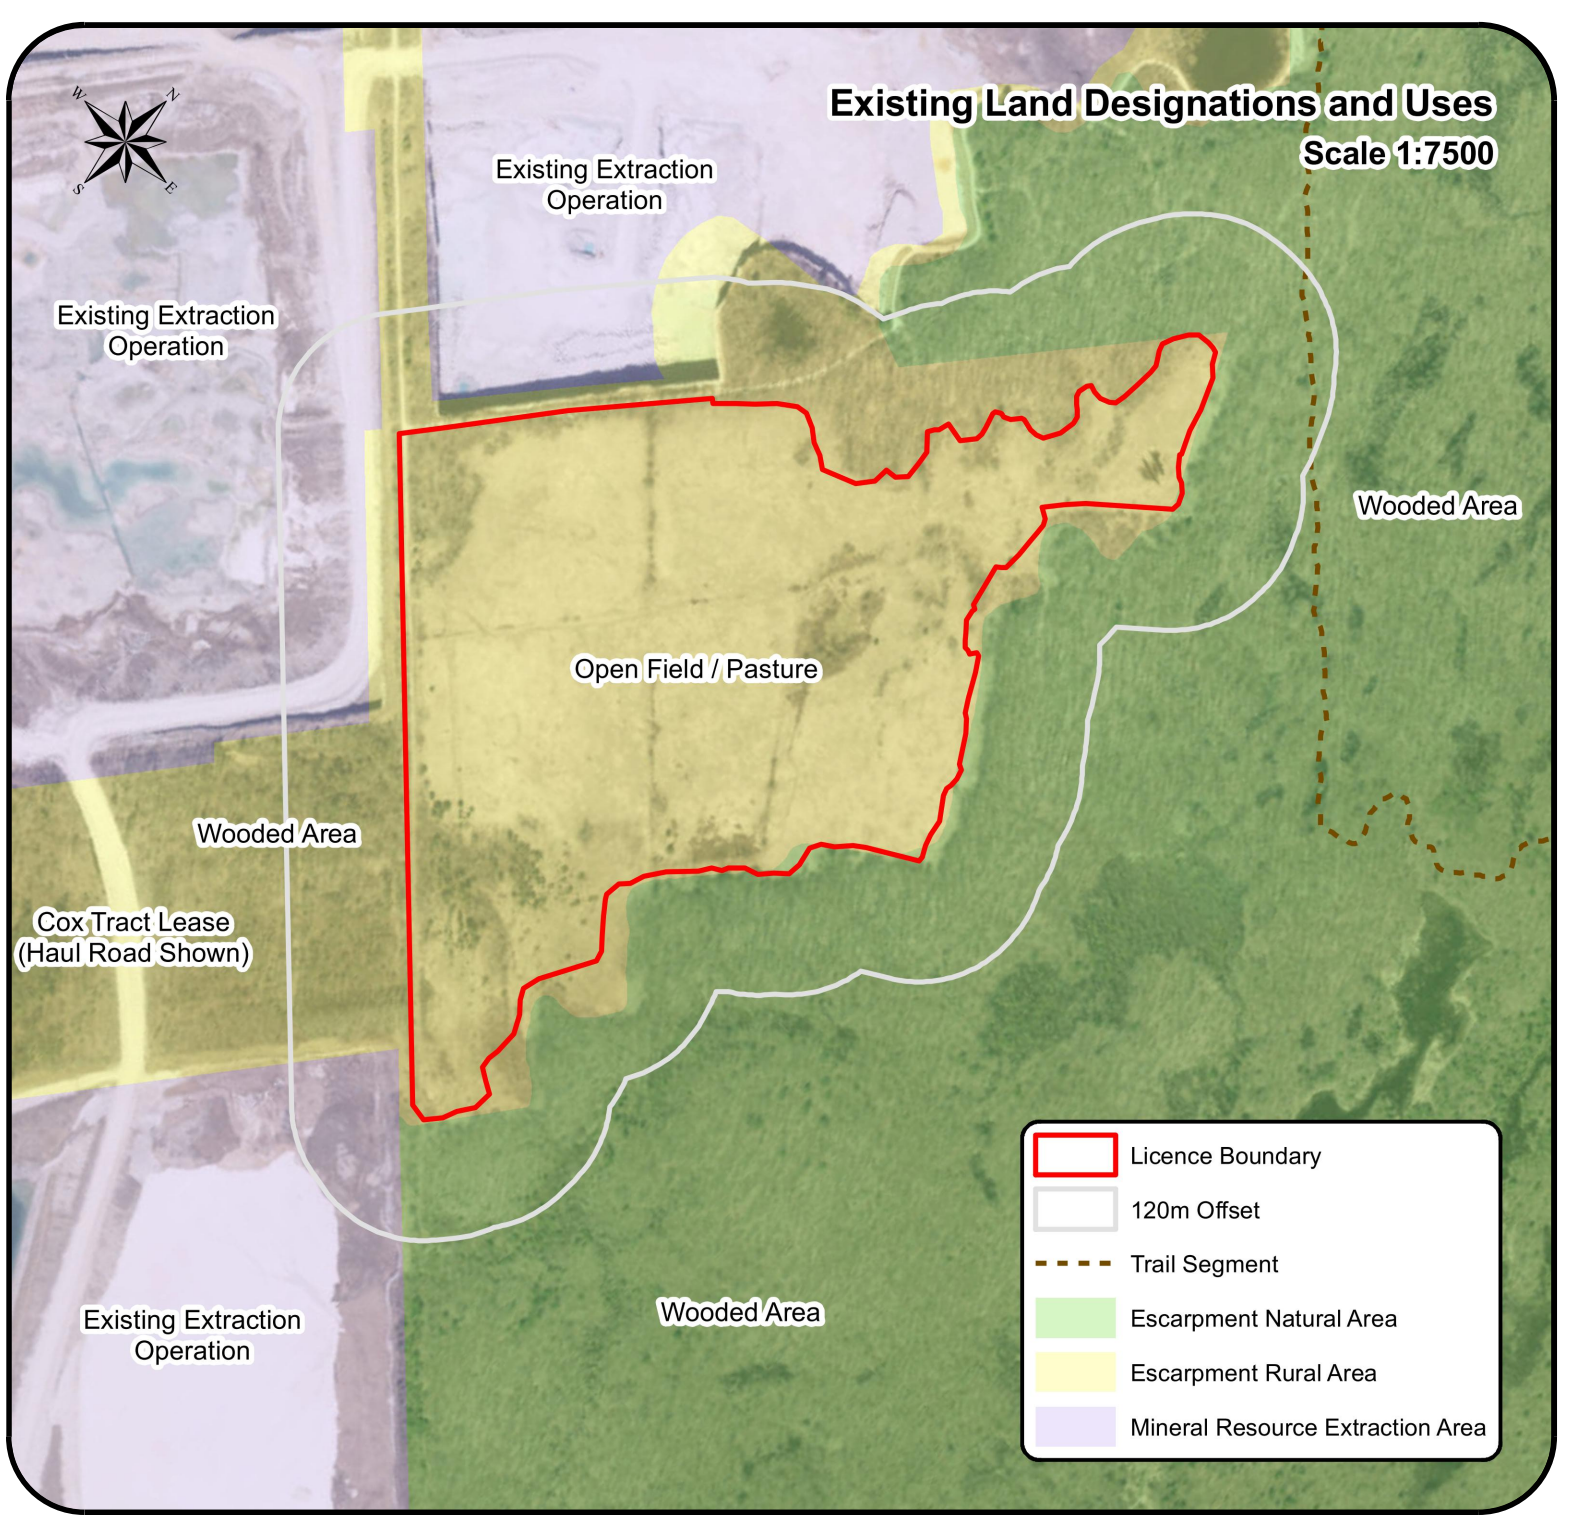

- General Notes:**
- Numbering scheme used for general and existing features notes refers to Aggregate Resources of Ontario Site Plan Standards.
  - The general description of the geographic location of the licence is provided on the plan view of this drawing.
  - All geographic features are shown to scale in Universal Transverse Mercator (UTM) with North American Datum 1927 (NAD27), Zone 17 (metre), Central Meridian 81 degrees west coordinate system. Northing and easting coordinates for select corners and where an entrance/exit intersects the licence boundary have been identified on the plan view.
  - The plan view on each drawing is at a scale of 1:2000 unless otherwise specified.
  - The applicant's contact information and signature is contained in the titleblock on each drawing.
  - Not applicable since it only applies to wayside permits.
  - The name and signature of the individual who prepared the site plan is located in the titleblock on each drawing.
  - This site plan is prepared under the Aggregate Resources Act (ARA) for a Class 'A' Licence for a quarry below the ground water table.
  - All references to north, south, east and west are based on site north (not true north).
  - The schedule for site plan amendments is contained in the titleblock for each drawing.
  - See titleblock for legend.
  - The licence boundary of the site including bearings (where applicable), dimensions and northing and easting coordinates are identified on the plan view of this drawing.
  - Area Calculations:  
Licence boundary 30.2 ha  
Limit of extraction 15.9 ha
  - Lot and concession lines are displayed and labelled on the plan view for each drawing.
- Existing Features Notes:**
- The following sources were utilized in preparation of this site plan:  
a. General References  
i.a. Topographic information (excluding contours - see Note 23 on this drawing) was obtained from numerous sources including Ontario Geofab (Land Information Ontario), Northway Photomap Inc. aerial photography captured in the spring of 1997, Google Earth Pro aerial photography captured on May 7, 2018 and field investigations for technical reports.  
i.b. The licence boundary was established using a Sketch prepared by Fred G. Cunningham - Ontario Land Surveyor, dated December 2, 1997 and the significant woodland boundary provided by Goodban Ecological Consulting Inc. (GEC) dated March 23, 2021. Distances between northings and eastings are approximate and for reference purposes only.  
i.c. Land use designations on and within 120 metres of the licence boundary are from the Niagara Escarpment Plan, May 3 - Regional Municipality of Halton, approved June 1, 2017. All land within the licence boundary is designated 'Escarpment Rural Area'. Municipal zoning in this area does not apply.  
i.d. Land use information identified on or within 120 metres of the licence boundary was determined using Google Earth Pro aerial photography captured on May 7, 2018.  
b. Technical Report References  
i.a. Agricultural Impact Assessment, Milton Quarry East Extension, DBH Soil Services Inc., November 4, 2021.  
i.b. Milton Quarry East Extension Noise Impact Study, Aerocoustics Engineering Ltd., December 7, 2021.

**Key Natural Heritage Features Schematic**  
Scale 1:4000

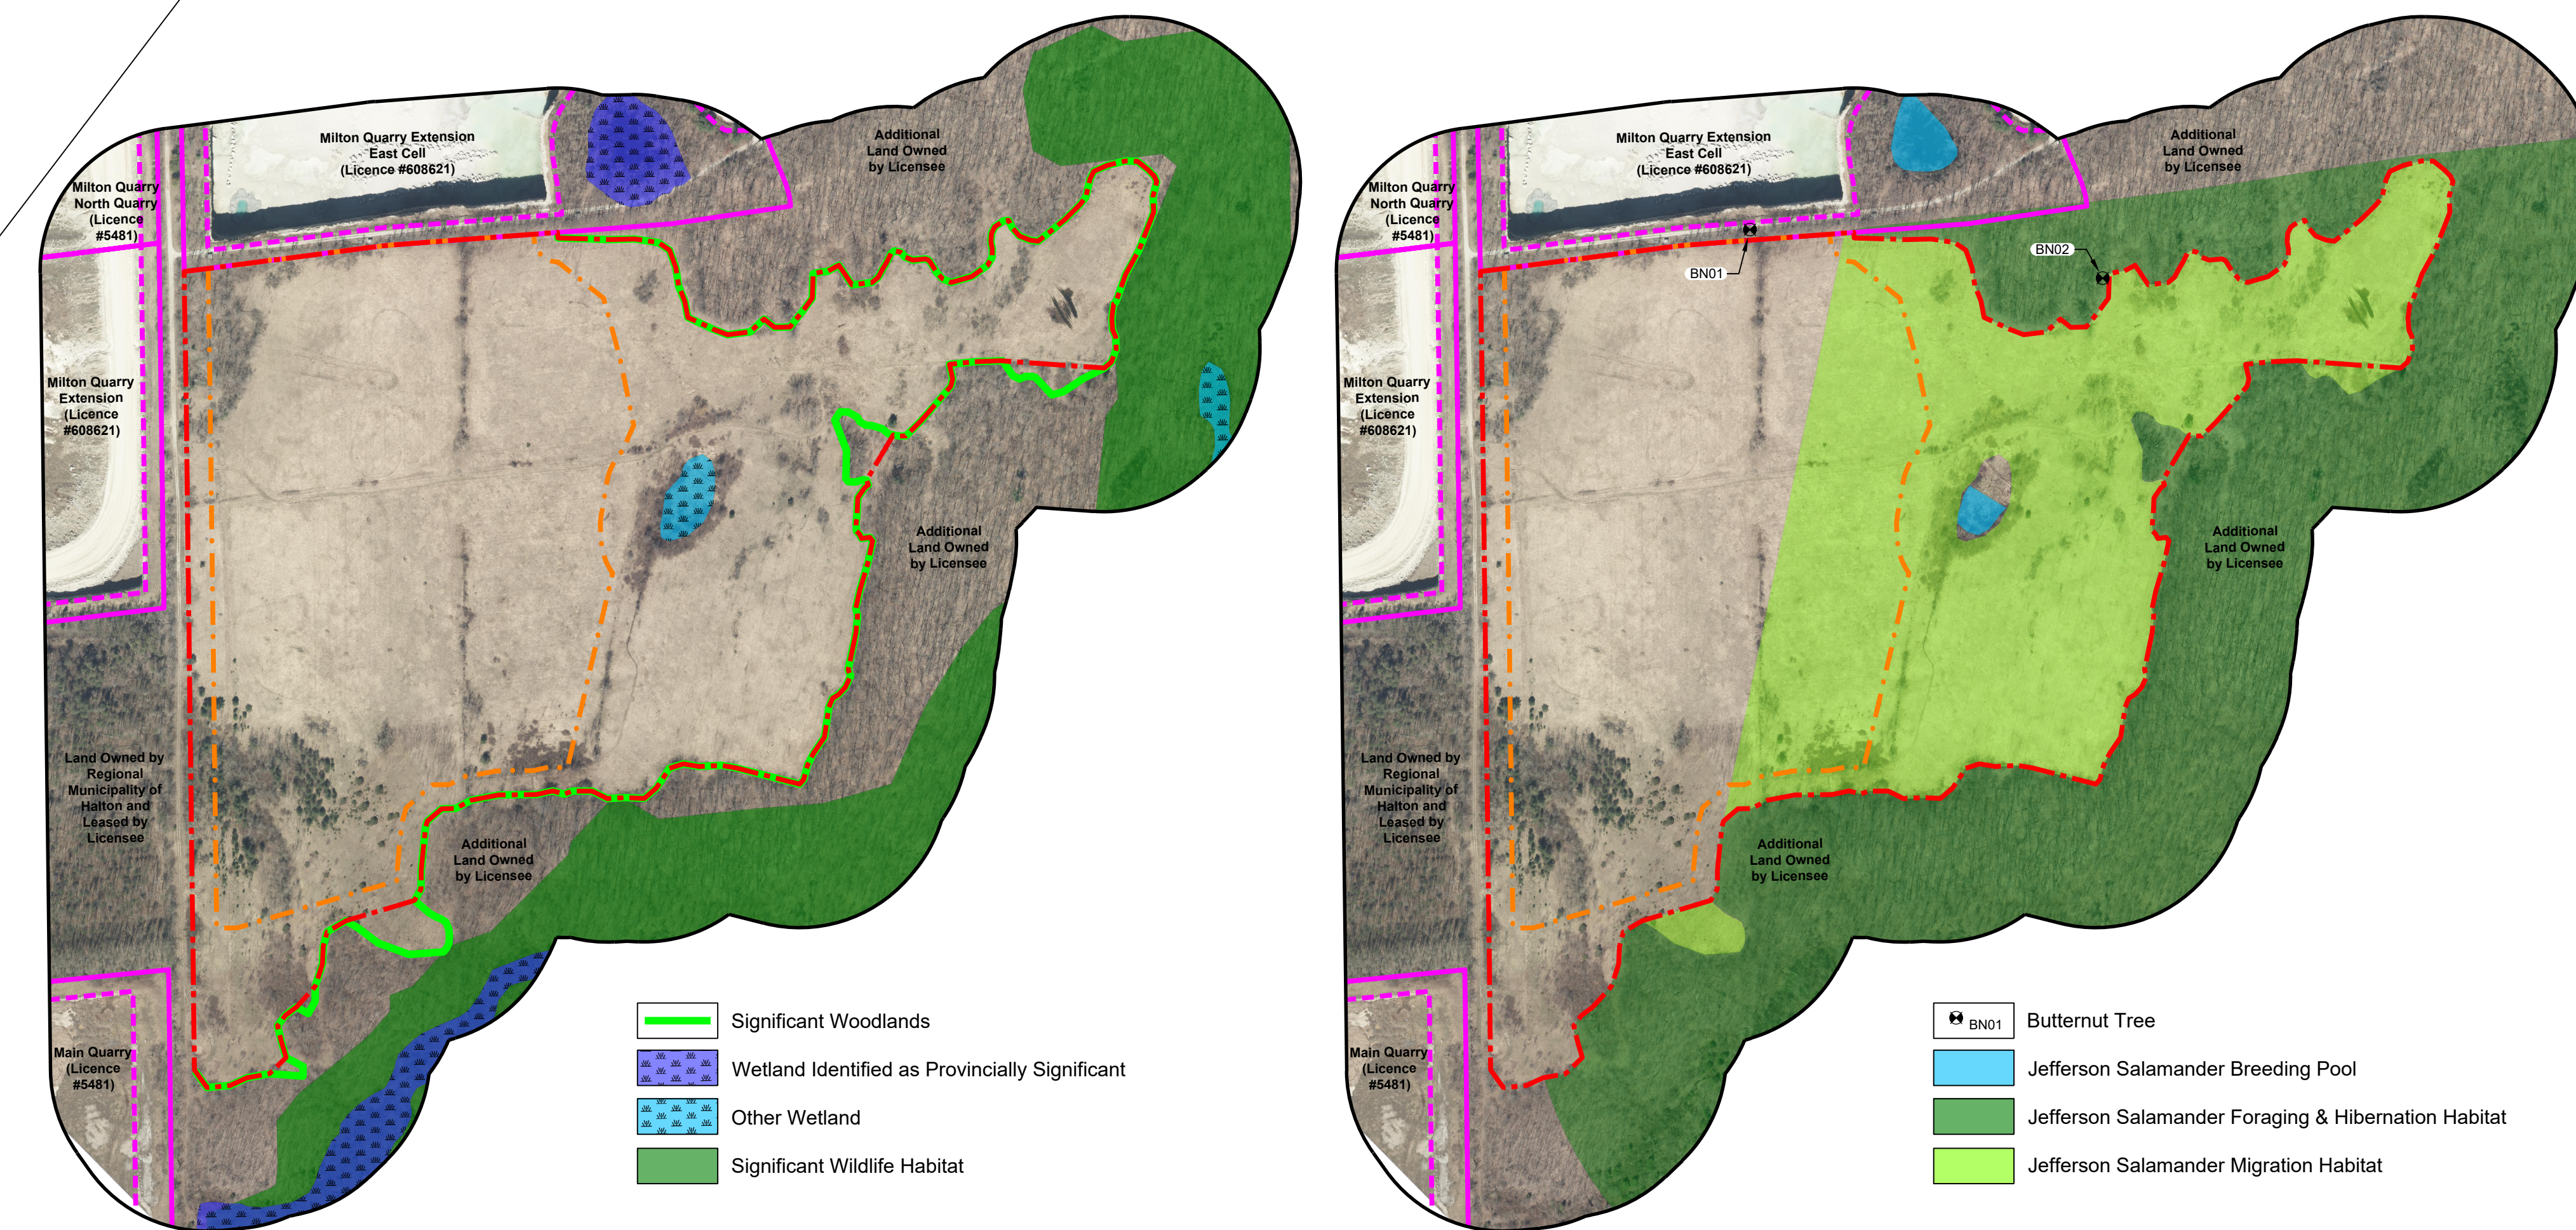

- Site Plan Acronyms**
- ARA - Aggregate Resource Act
  - NDMNRF - Ministry of Northern Development, Mines, Natural Resources and Forestry
  - MHSTCI - Ministry of Heritage, Sport, Tourism and Culture Industries
  - MGCS - Ministry of Government and Consumer Services
  - MECP - Ministry of the Environment, Conservation and Parks
  - AMP - Adaptive Environmental Management and Protection Plan
  - ANSI - Area of Natural and Scientific Interest
  - ESA - Environmentally Sensitive Area
  - OWRA - Ontario Water Resources Act
  - MQEE - Milton Quarry East Extension
  - EHP - Ecological Enhancement Plan
  - WMS - Water Management System
  - MASL - Metres above mean sea level
  - PTTW - Permit to Take Water

- Legal Description**  
Part of Lots 11 and 12, Concession 1  
(former geographic Township of Esquesing)  
Town of Halton Hills  
Regional Municipality of Halton
- Legend**
- Licence Boundary
  - Limit of Extraction
  - Contours with Elevation  
Metres above sea level (MASL)
  - Road
  - Field Access
  - Excavation Face
  - Disturbed Area
  - Wooded Area
  - Wetland  
Boundaries Determined by GEC
  - Control Hut
  - Existing Licence Boundary
  - Existing Limit of Extraction
  - 120m Offset From Licence Boundary
  - Lots and Concessions
  - Trail Segment
  - Overhead Hydro
  - Existing Watermain
  - Fence  
1.2m post & wire fence unless otherwise noted
  - Entrance / Exit  
Field Entrance
  - Direction of Surface Drainage
  - Cross Sections

- Legend - Cross Sections**
- Licence Boundary
  - Limit of Extraction
  - Existing Licence Boundary
  - Existing Limit of Extraction
  - Existing Grade
  - Maximum Predicted Water Table  
Based on existing and interim conditions
  - Maximum Depth of Excavation
  - Topsoil and/or Overburden
  - Aggregate Available for Extraction

**Site Plan Amendments**

No.	Date	Description	By

**Site Plan Revisions (Pre-Licensing)**

No.	Date	Description	By
1	January 2022	Update Operational Plan per feedback from NDMNRF	CAP

**MHBC Stamp**  
Is authorized by the Ministry of Northern Development, Mines, Natural Resources and Forestry pursuant to Subsection 0.2(3)(9) of Ontario Regulation 244/97 to prepare and certify site plans.  
*Brian Zeman*

**MHBC Stamp**  
Is authorized by the Ministry of Northern Development, Mines, Natural Resources and Forestry pursuant to Subsection 0.2(3)(9) of Ontario Regulation 244/97 to prepare and certify site plans.  
*Christopher Poole*

**Site North**  
True North

**Applicant**  
Dufferin Aggregates  
A Division of CRH Canada Group Inc.  
2300 Steeles Avenue West, 4th Floor  
Concord, Ontario  
L4K 5X6

**Project**  
**Milton Quarry East Extension**  
10305 Nassagaweya Esquesing Townline, Halton Hills, Ontario

**NDMNRF Licence Reference No.**  
Applicant's Signature  
*Christopher Poole*

**Plan Scale:** 1:2000 (Arch E)  
Date: December 2021  
Drawn By: C.P. File No.: 9061DJ  
Checked By: B.Z.

**File Name**  
**Existing Features & Cross Sections**

**Drawing No.**  
**1 of 4**

**File Path**  
N:\9061DJ - Dufferin - Milton Quarry East Extension\Drawings - Must be in NAD 27 Site Plan\CAD\9061DJ - Site Plan - January 2022.dwg

Numbering scheme used for operational notes refers to Aggregate Resources of Ontario Site Plan Standards.

- All entrances and exits are shown on the plan view of this drawing. Highway trucks and quarry vehicles will access Phases 1 and 2 anywhere along the common limit of extraction with Licence #006821. Highway trucks and quarry vehicles (excluding off road haul trucks) may also use the entrance/exits in the southwest corner of Phase 1 to access the site from Licence #5481 for rehabilitation purposes.
- A gate shall be installed at the entrance/exits in the southwest corner of Phase 1, kept closed during hours of non-operation and maintained. A gate shall not be required where haul roads cross the common boundary with Licence #006821 (see Operational Note 54 - Variations from Control and Operation Standards on this drawing).
- The area to be extracted is 15.9 ha.
- Not applicable since it only applies to aggregate permits.
- Prior to any site clearing, the licence boundary shall be fenced with 1.2 m post and wire fencing in the locations shown on the plan view. Fencing shall not be required along the common boundary with Licence #006821 to eliminate constraints associated with the extraction operation, along the north boundary of the licence since the property boundary is already fenced and in the southwest corner since there is an existing fence to the east (see Operational Note 54 - Variations from Control and Operation Standards on this drawing).
- Where the licence boundary is not fenced, the licence boundary shall be delineated with marker posts a maximum of 30 metres apart. The marker posts shall be visible from one marker to the next.
- The entire site will be fenced through a combination of existing and proposed fencing to restrict access to the extraction area and the area consisting of the main watermain. All fencing shall be maintained.
- Throughout the life of the operation there shall:
  - Be no buildings or structures except those associated with the water management system;
  - Be no scrap areas;
  - Be internal haul roads located anywhere on the quarry floor;
  - Be service access roads to access the watermain, feeder lines and associated facilities for the recharge mitigation system, and for drills and blasting trucks; and
  - Be stockpiles of aggregate, topsoil and overburden located anywhere within the limit of extraction (see Operational Note 54 - Variations from Control and Operation Standards on this drawing).
- No processing shall occur on-site. Excavated material shall be hauled to Licence #5481 for processing (extraction Scenario 1; see Noise Note F(1) or to portable processing plants in the East End of Licence #006821 and Main Quarry of Licence #5481 for processing (extraction Scenario 2; see Noise Note F.7).
- Aggregate recycling shall not occur within this licence.
- The site shall be extracted in two phases. Phase 1 shall be extracted in a southerly direction and Phase 2 shall be extracted in an easterly direction (as depicted on the plan view).
- Prior to the stripping of topsoil and overburden, Natural Environment Notes E.2 and E.4 shall be implemented and notes E.3 to E.9 shall be adhered to. Topsoil and overburden shall be stripped separately wherever there are distinguishable layers and sufficient thickness to allow separate handling.
  - Organics and topsoils (for final dressing to promote regeneration);
  - Non-structural fill;
  - Structural material.
- Temporary topsoil and overburden stockpiles which remain for more than six months shall be graded and seeded to control erosion. Seeding shall not be required if these stockpiles have vegetated naturally in the six months.
- The maximum number of lifts is three, while the majority of the operation will occur in two lifts. Operations may go to one or three lifts as required based on depth of resource or mitigation requirements. The depth of the first lift will vary from the surface to add to topography and thickness of the resource but shall have a minimum elevation of 320 masl. The first lift includes a shallow extraction lift (replaces formation) across the quarry floor. The maximum height of each lift shall not exceed Ministry of Labour equipment limitations.
- Surface runoff from the site preparation area shall be controlled to contain erosion and sedimentation outside of the extraction area by installing the siltation/extraction fencing in the locations shown on the plan view. The extraction operations shall be conducted in a dry (dewatered) state and hence dewatering of the extraction area shall be required. Dewatering and discharge shall be in accordance with a Permit to Take Water (PTTW) under the Ontario Water Resources Act (OWRA) and an Environmental Compliance Approval (ECA) under the Environmental Protection Act. The active quarry area shall be dewatered using a sump constituted in the quarry floor, through the royalties and into the top of the east head shaft. Water shall be pumped from the sump and conveyed through a surface and/or buried pipe discharge system. Ground and surface water is collected and conveyed to adjacent Licence #006821 and Licence #5481 for storage and integration into the ground water recharge and mitigation system.

The priority for water use will be for:

- The protection of the environment first (i.e. downstream flow to the Hilton Falls Tributary as per agreement with Conservation Halton and operation of the mitigation system to maintain target water levels & support natural features and functions);
  - Operation of the quarry second; and
  - Filling of the lakes third.
- Any surplus water not required for these purposes and for which no storage is available shall be discharged to Hilton Falls Reservoir Tributary.
- The site is not within a wellhead protection area and source water protection policies do not apply.

- Site preparation, a Spills Contingency Plan shall be developed and implemented. Fuel trucks shall be utilized for refueling mobile quarry equipment in accordance with the Liquid Fuels Handling Code. All spills on site shall be handled in accordance with the Spills Contingency Plan. No fuel shall be stored on-site.
- See plan view on this drawing for the location and labelling of all extraction limits from the licence boundary.
- See plan view on this drawing for the location and labelling of all extraction limits from the licence boundary.
- See plan view on this drawing for the maximum depth of extraction elevations through the use of spot elevations. The site plan allows for the full removal of the amphibole-bearing limestone units and the proposed spot elevations may vary by 5-3 metres with the depth of the resources encountered.
- No acoustic or visual berms are required. Therefore, the location and minimum height of berms have not been provided.
- No acoustic or visual berms are required. Therefore, details regarding how berms will be vegetation and maintained are not provided.
- Prior to extraction below the water table, installation of the hydrogeologic monitoring and mitigation systems shall occur. Extraction of the bedrock will involve drilling blast holes, blasting and loading blasted aggregate into Off-Road trucks where it will be transferred to Licence #006821 and Licence #5481 for processing and shipping to market. See Operational Note 33 for additional information.
- On-site equipment (and reference to noise emission levels in dba @ 30m) will include:
  - Site preparation and Rehabilitation
    - Backhoes
    - Haul trucks
    - Bulldozers
    - Skidders
    - Graders
    - Compactors
    - Water and fuel trucks
    - Tree clearing equipment
    - Maintenance trucks
    - Highway trucks
    - Pickup trucks
  - Drilling, extraction and transport
    - 3 rock drills
    - 2 extraction loaders
    - 1 excavator
    - 24 Off-Road truck trips per hour (48 passes per hour)
    - Water trucks
    - Maintenance trucks
    - Explosive trucks & service vehicles as required
    - Pickup trucks
- 51. No visual tree screens are required.
- Hours of operation:
  - Extraction: Monday to Sunday, 24 hours per day
  - Loading and shipping: Monday to Sunday, 24 hours per day
  - Maintenance: Monday to Sunday, 24 hours per day
  - Site preparation & rehabilitation: Monday to Sunday between 7:00 a.m. and 7:00 p.m.
  - Drilling: Monday to Friday between 8:00 a.m. and 6:00 p.m.
  - Blasting: Monday to Friday between 8:00 a.m. and 6:00 p.m.
- Operations shall not occur on statutory holidays but maintenance may occur.
- Timber resources shall be salvaged for use as saw logs, fence posts and fuel wood where appropriate. Stumps, trees, shrubs and brush cleared shall be used for rehabilitation of this site and Licence # 608022 and Licence #5481 to provide areas and fire wood debris to enhance soils and create habitats during site rehabilitation (see Natural Environment Note E.3 for additional information).

54. Variations from Control and Operation Standards

Section 6(1)	Variation	Rationale
(11) & (12)	Gates shall not be required where haul roads cross the common boundary with Licence #006821.	This will eliminate constraints to the movement of equipment between licences owned by the same licensee.
(11) & 11	Excavation shall occur in the setback area to install the water mitigation system.	Water mitigation system is required to be built below the frost line.
(11)(f)	A 0 metre setback shall be provided where the licence abuts existing Licence #006821.	This will enable material to be extracted along the common boundary and for rehabilitation to transition between licences. A site plan amendment for existing Licence #006821 is required.
(11)(h) ii	A 20 metre setback shall be provided along the western boundary adjacent to the road allowance which is closed to public access.	This will be consistent with Licence #006821 to the north which has a 20 metre setback along the western boundary adjacent to the road allowance which is closed to public access.
(11)(3)	Aggregate, topsoil and overburden stockpiles may be located within 30 metres of the licence boundary.	The licensee owns the land to the north, east and south while Town Lane Flood to the west is closed to public access.
(11)(7 & 1)(8)	Topsoil and overburden may be transferred to existing Licence #5481 and/or Licence #006821.	This will allow stripped material from site preparation to be used immediately for progressive rehabilitation or for overburden to be used in ramp construction in other parts of the existing licence.
(1) 19	Portions of the quarry faces shall remain vertical. See drawings 3 of 4 and 4 of 4.	To allow movement of groundwater from the lakes towards off site features and to create a more diversified habitat and visually interesting rehabilitated landform.
(3)(A)	Portions of the licence boundary shall not be fenced.	The licence boundary shall be demarcated every 30 metres where required. See Operational Note 30 for additional information.

- The maximum annual tonnage for this site is unlimited.
  - The site is not located within the Protected Countryside of the Greenbelt Act.
  - Blasting may occur up to three times per day, Monday to Friday between 8:00 a.m. and 6:00 p.m. excluding statutory holidays.
  - There are no sensitive receptors within 500 m of the site. The closest sensitive receptor is over 1,200 metres from the site.
  - The maximum annual tonnage for this site is unlimited.
  - The site is not located within the Protected Countryside of the Greenbelt Act.
- Technical Report Recommendations**
- Air Quality**
- The licensee shall apply water or another provincially approved dust suppressant to internal haul roads and processing areas, as necessary to mitigate dust, if the quarry is located within 1,000 metres of a sensitive receptor.
  - The licensee shall equip any processing equipment that creates dust with dust suppressing or collection devices if it is located within 500 metres of a sensitive receptor.
  - The licensee shall obtain an Environmental Compliance Approval under the Environmental Protection Act where required to carry out operations of the quarry.
  - The site will operate in accordance with CRHS Dust Control Work Instruction, which functions as a Best Management Practices Plan for fugitive dust, which may be amended from time to time, considering actual impacts and operational considerations. The recommendations in the Work Instruction are based on the maximum daily production rates. At lower production rates, the control measures specified in the Dust Control Work Instruction can be reduced accordingly, provided dust remains mitigated on site.
- B. Archaeology**
- Should deeply buried archaeological remains be found during the course of site preparation and/or extraction related activities, the Ministry of Heritage, Sport, Tourism and Culture Industries (MHTSCI) shall be notified.
  - In the event that human remains are encountered during construction or extraction activities, the licensee shall immediately contact both the MHTSCI and the Registrar or Deputy Registrar of the Cemeteries Regulation Unit of the Ministry of Government and Consumer Services (MGCS).

C. Blasting

- All blasts shall be monitored for both ground vibration and overpressure by an independent Blast Consultant at the closest privately owned sensitive receptors adjacent the site, or at a location that is closer than a sensitive receptor, with a minimum of two (2) instruments - one installed in foot of the blast and one installed behind the blast.
- The guideline limits for vibration and overpressure shall adhere to standards as outlined in the MECP Model Municipal Noise Control by-law publication NRC 119 (1978) or any such document, regulation or guideline which supersedes this standard.
- In the event of an exceedance of NRC 119 limits or any such document, regulation or guideline which supersedes this standard, blast designs and protocols shall be reviewed prior to any subsequent blasts and revised accordingly in order to return the operations to compliance.
- Orientation of the aggregate extraction operation will be designed and maintained so that the direction of the overpressure propagation will be away from structures as much as possible.
- Blast designs shall be continually reviewed with respect to fragmentation, ground vibration and overpressure. Blast designs shall be modified as required to ensure compliance with applicable guidelines and regulations.
- Blasting procedures such as drilling and loading shall be reviewed on a yearly basis and modified as required to ensure compliance with industry standards.
- Detailed blast records shall be maintained in accordance with current industry best practices.

D. Geology and Water Resource

- Implement and operate the proposed water management system mitigation and rehabilitation measures, including any necessary response actions, in accordance with the Adaptive Environmental Management and Protection Plan (AMP) Addendum.
  - Conduct the water and ecology monitoring program and reporting in accordance with the AMP Addendum.
  - Amend the OWRA approvals as necessary to reflect the aspects of the water management measures relevant to those approvals.
  - Extend the implementation of the Milton Quarry Contingency and Pollution Prevention Plan to include the Milton Quarry East Extension (MQUE).
- E. Natural Environment**
- No development is permitted within the habitat of Jefferson Salamander and Unisexual Ambystoms (Jefferson Salamander dependent population) unless authorized by an Endangered Species Act (ESA) Permit or other authorization from the Ministry of Environment, Conservation and Parks (MECP). A copy of the ESA Permit will be provided by the proponent to the NDMNRF Aggregate Inspector.
  - The limit of extraction shall be clearly demarcated with monument markers (e.g., metal 1.5m or equivalent) with maximum spacing of 20 metres between markers. In proximity to the Significant Woodland Boundary and Ecological Enhancement Plan (EEP) areas, the maximum spacing of monument markers shall be 10 metres and signage stating "Ecological Area - No Disturbance" or equivalent wording shall be installed.
  - The limits of disturbance for the WMS installation shall be clearly demarcated, especially in the vicinity of the Significant Woodland, wetlands, buffer areas and EEP areas, prior to commencing WMS installation works.
  - Silt/extraction fencing shall be installed in the location shown on the plan view. Salamander Excluder will be installed at the locations shown on the plan view. Silt/Exclusion fencing may be heavy-duty silt fencing, Annetex Wildlife Fencing or equivalent. The location of the fencing shall be monitored on a regular basis and it shall be promptly repaired as necessary.
  - The western access road located between the two Salamander Excluders shall only be used for WMS monitoring and maintenance, ecological enhancement works and ecological monitoring. It shall not be used for operational purposes.
  - Tree-clearing shall not occur during the active period for bats and the bird breeding season between April 1st and October 31st. This will avoid potential contraventions of the Migratory Bird Convention Act and the Endangered Species Act.
  - Stripping of topsoil and ground vegetation shall not occur during the bird breeding season between April 1st and August 28th. This will avoid potential contraventions of the Migratory Bird Convention Act and the Endangered Species Act. Stripping of overburden may occur during the bird breeding season, provided that the topsoil and ground vegetation has already been removed.
  - Blockers, rocks and cobbles will be salvaged from fence lines and stone piles within the limit of extraction. Weathered rocks will also be salvaged during stripping operations. This material will be stockpiled within the extraction area for use as part of the Ecological Enhancement Plan (EEP), diffuse discharges, and future quarry rehabilitation.
  - Logs, stumps, root wads and branches will be salvaged during clearing and grubbing operations. Tree tops may be chipped. The salvaged woody material and wood chips will be stockpiled within the extraction area for use as part of the EEP and future quarry rehabilitation.
  - The Water Management System (WMS) shall be installed consistent with the restrictions and design considerations provided in the AMP Addendum (GMD) and Goodwin Ecological Consulting Inc., December 2021.
  - The EEP shall be implemented as per the details outlined on drawings 3 of 4 and 4 of 4.

F. Noise

- The quarry equipment shall satisfy the noise emission levels listed below.
 

Equipment	Reference Sound Pressure Level at 30m (dBA)
Rock Drill	85
Extraction Loader	76
Excavator	70
Off-Road Truck	74








- New equipment technology or different configurations may allow proposed changes to any portion of the extraction and processing operations including additional equipment to operate on the site, equipment to be substituted, and/or different beam heights, while still meeting the applicable sound level limits. Changes may be permitted to the site operations and noise controls provided that the changes still meet the sound level limits, as confirmed through documentation prepared by a Professional Engineer specializing in noise control.
- Drilling operations shall be limited to daytime hours only (07:00 to 19:00).
- The operation may be carried out in one or more separate lifts. If extraction is carried out in multiple lifts, the first lift shall have a maximum elevation of 325 masl.
- The sound emissions level of construction equipment involved in site preparation and rehabilitation activities shall comply with the sound level limits specified in the MECP publication NRC-115 "Construction Equipment".

- Noise controls for Scenario 1:
  - a. The extraction, processing and shipping equipment operating in the quarry is limited to:
    - Three (3) Rock Drills
    - Two (2) Extraction Loaders
    - One (1) Excavator
    - 32 Off-Road truck trips per hour (64 passes per hour)
- Phase 1:
  - a. Drilling in the Phase 1 "restricted drilling area" indicated on the operational plan is limited to two (2) rock drills operating simultaneously for the first lift only.
  - b. Drilling in the Phase 1 "single drill area" indicated on the operational plan is limited to one (1) rock drill for the first lift only. Two drills can be used simultaneously in this area on the first lift if a 3 m acoustic barrier is constructed to block line of sight between any drills and R17.
- Phase 2:
  - a. No additional Noise Controls.
- Noise controls for Scenario 2:
  - a. The extraction, processing and shipping equipment operating in the quarry is limited to:
    - Three (3) Rock Drills
    - Two (2) Extraction Loaders
    - One (1) Excavator
    - 32 Off-Road truck trips per hour (64 passes per hour)
  - b. Phase 1 and 2:
    - No additional Noise Controls.

**Legal Description**  
 Part of Lots 11 and 12, Concession 1  
 (former geographic Township of Esquesing)  
 Town of Halton Hills  
 Regional Municipality of Halton

**Legend**

- Licence Boundary
- Existing Licence Boundary
- Limit of Extraction
- Existing Limit of Extraction
- Contours with Elevation
- 120m Offset From Licence Boundary
- Road
- Lots and Concessions
- Service Access Road
- Trail Segment
- Extraction Face
- Overhead Hydro
- Disturbed Area
- Silt / Exclusion Fencing
- Wooded Area
- Existing Watermain
- Wetland
- Main Watermain
- Operational Access Unrestricted
- Feeder Line
- Operational Access Limited - No Off Road Haul Trucks
- Fence
- Field Entrance / Exit
- General Direction of Excavation & Boundary
- Gate
- Silt Elevation
- Salamander Excluder Location
- Cross Sections
- Control Hut

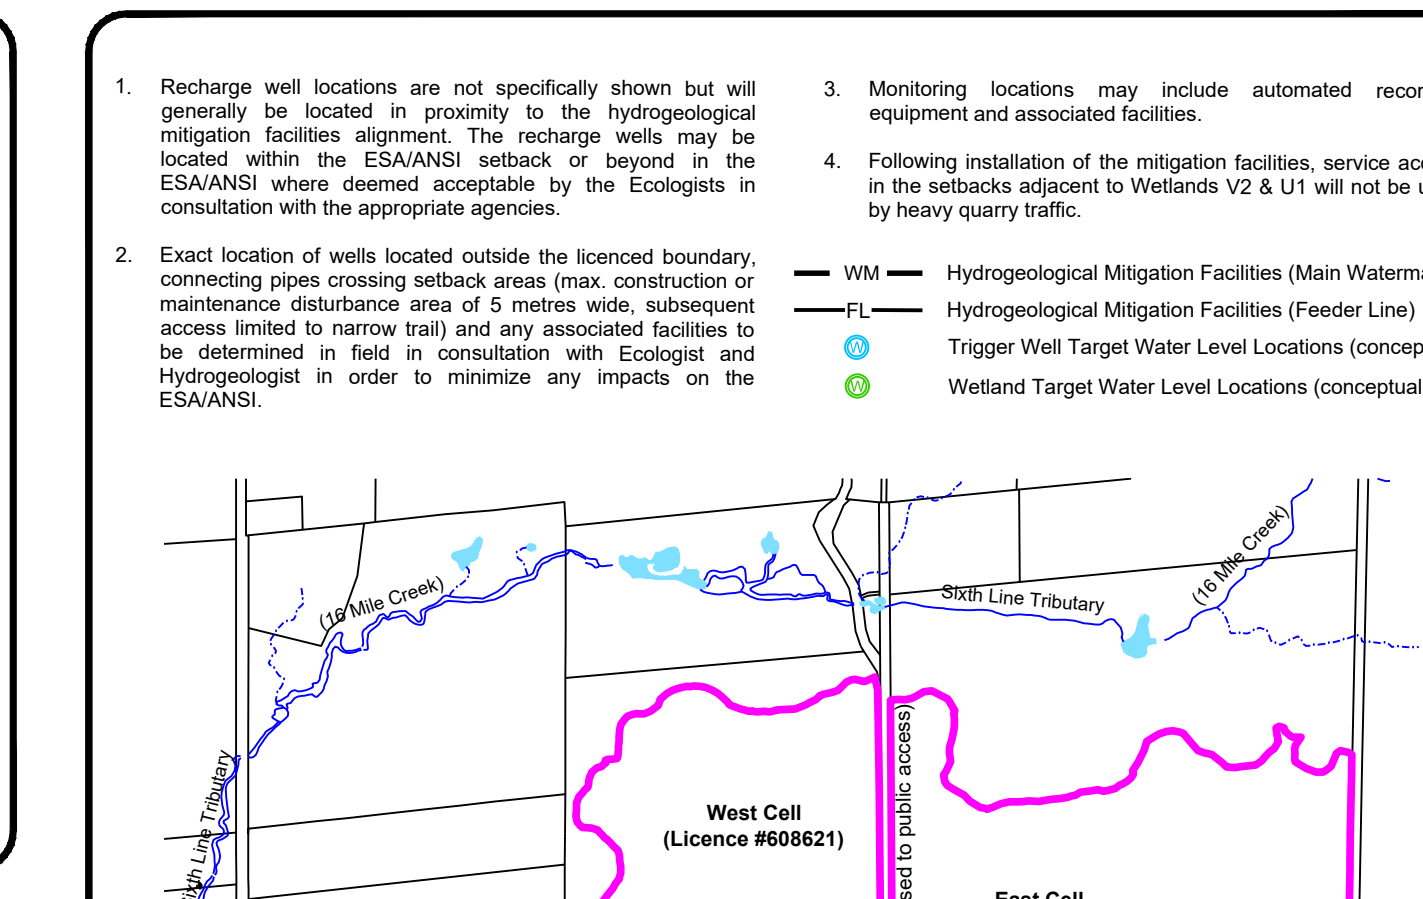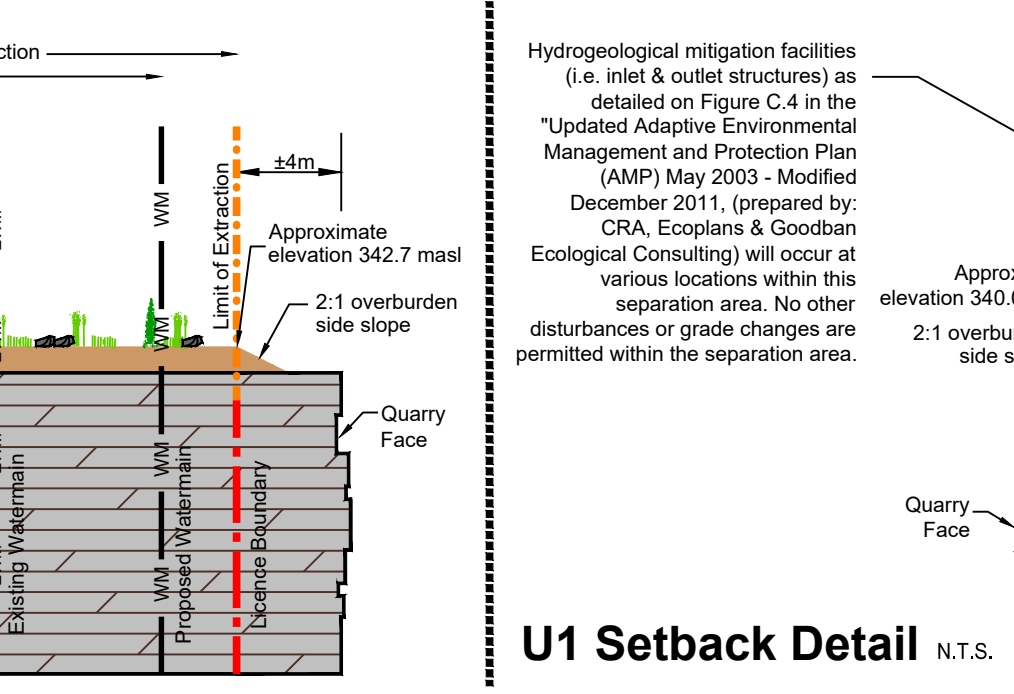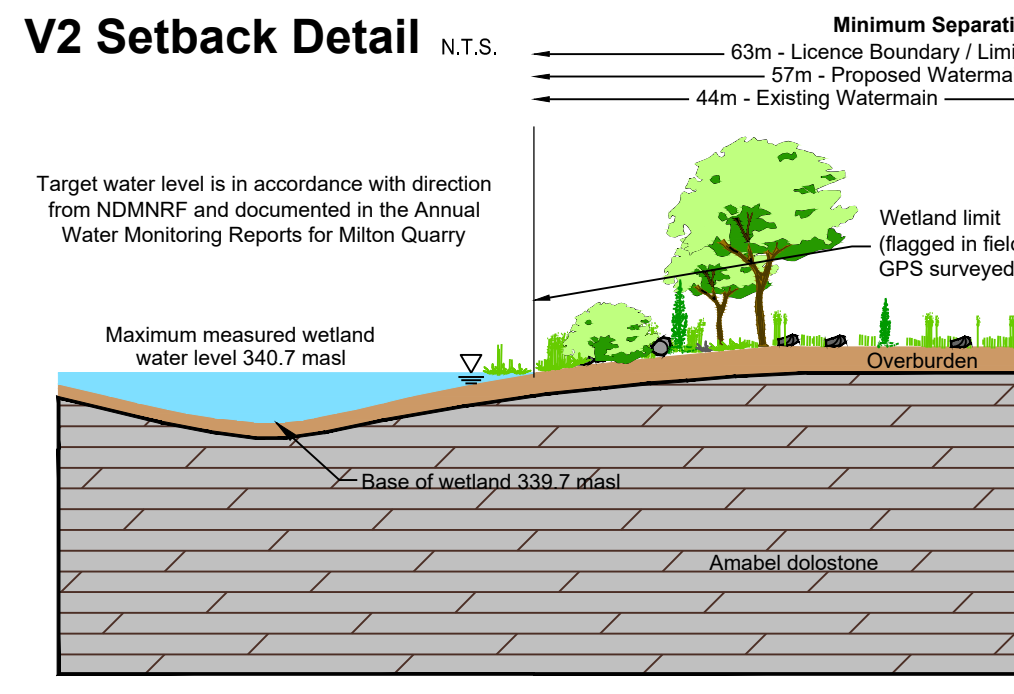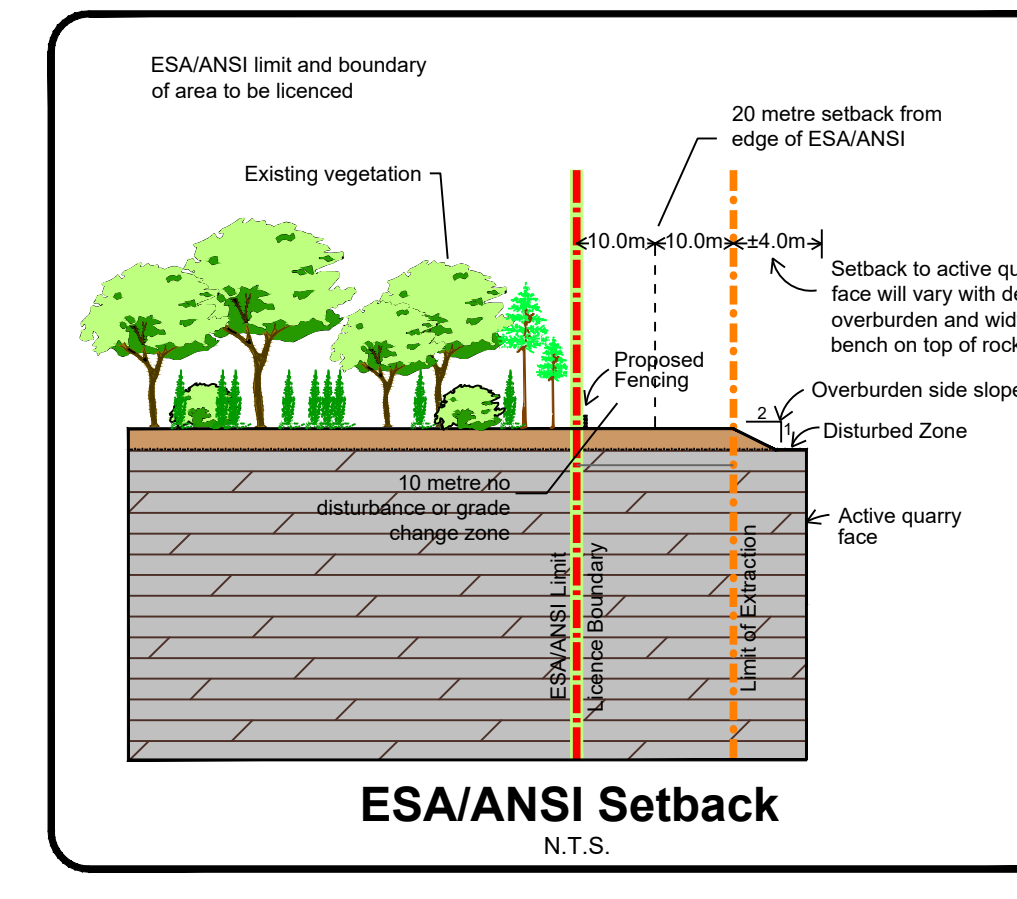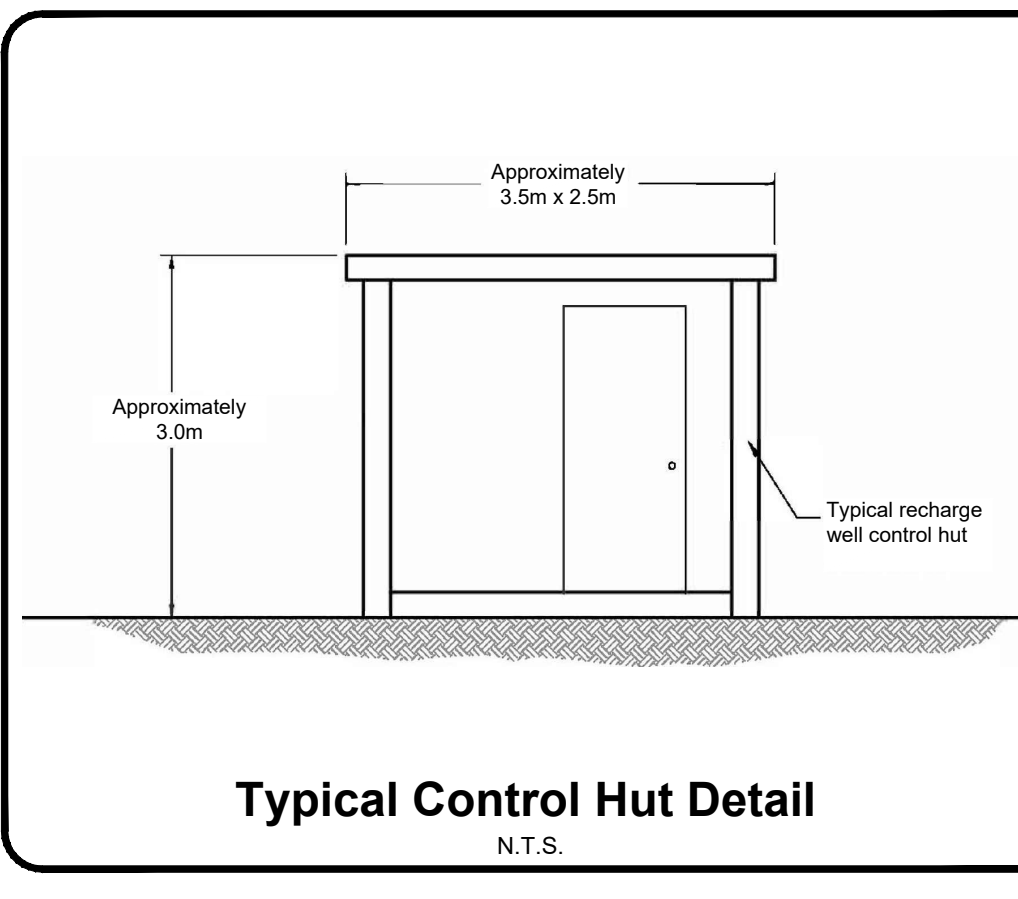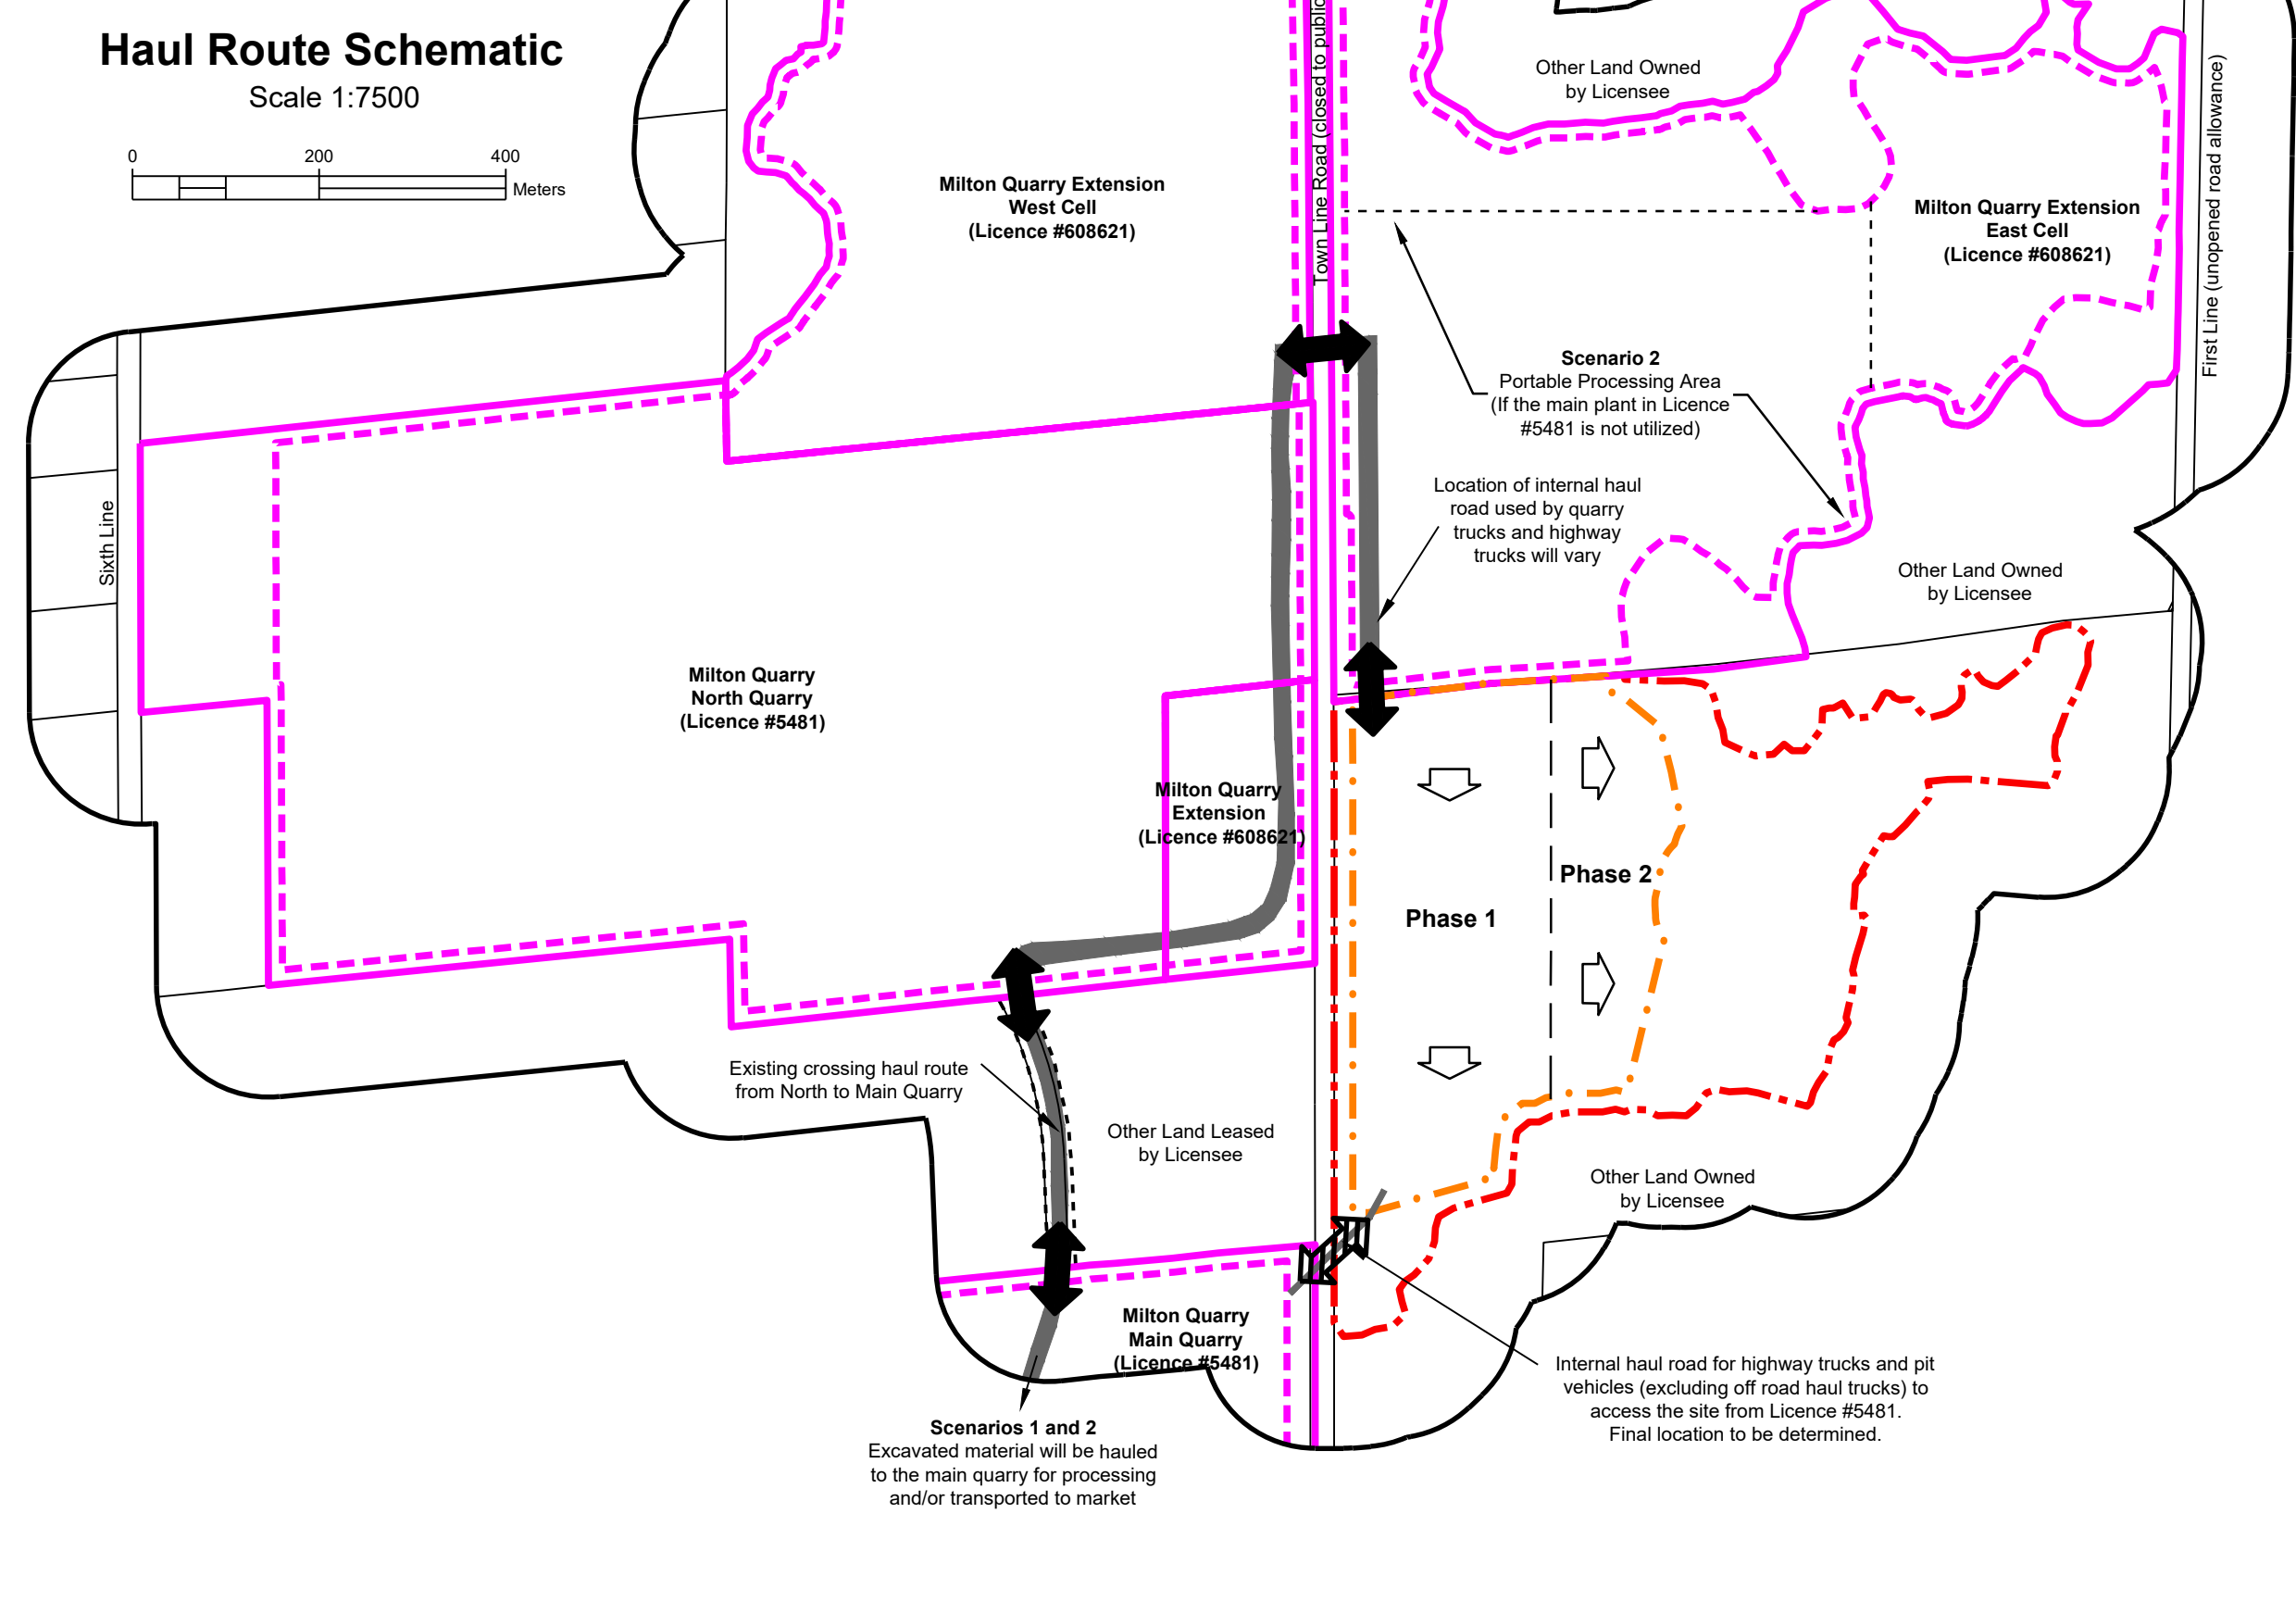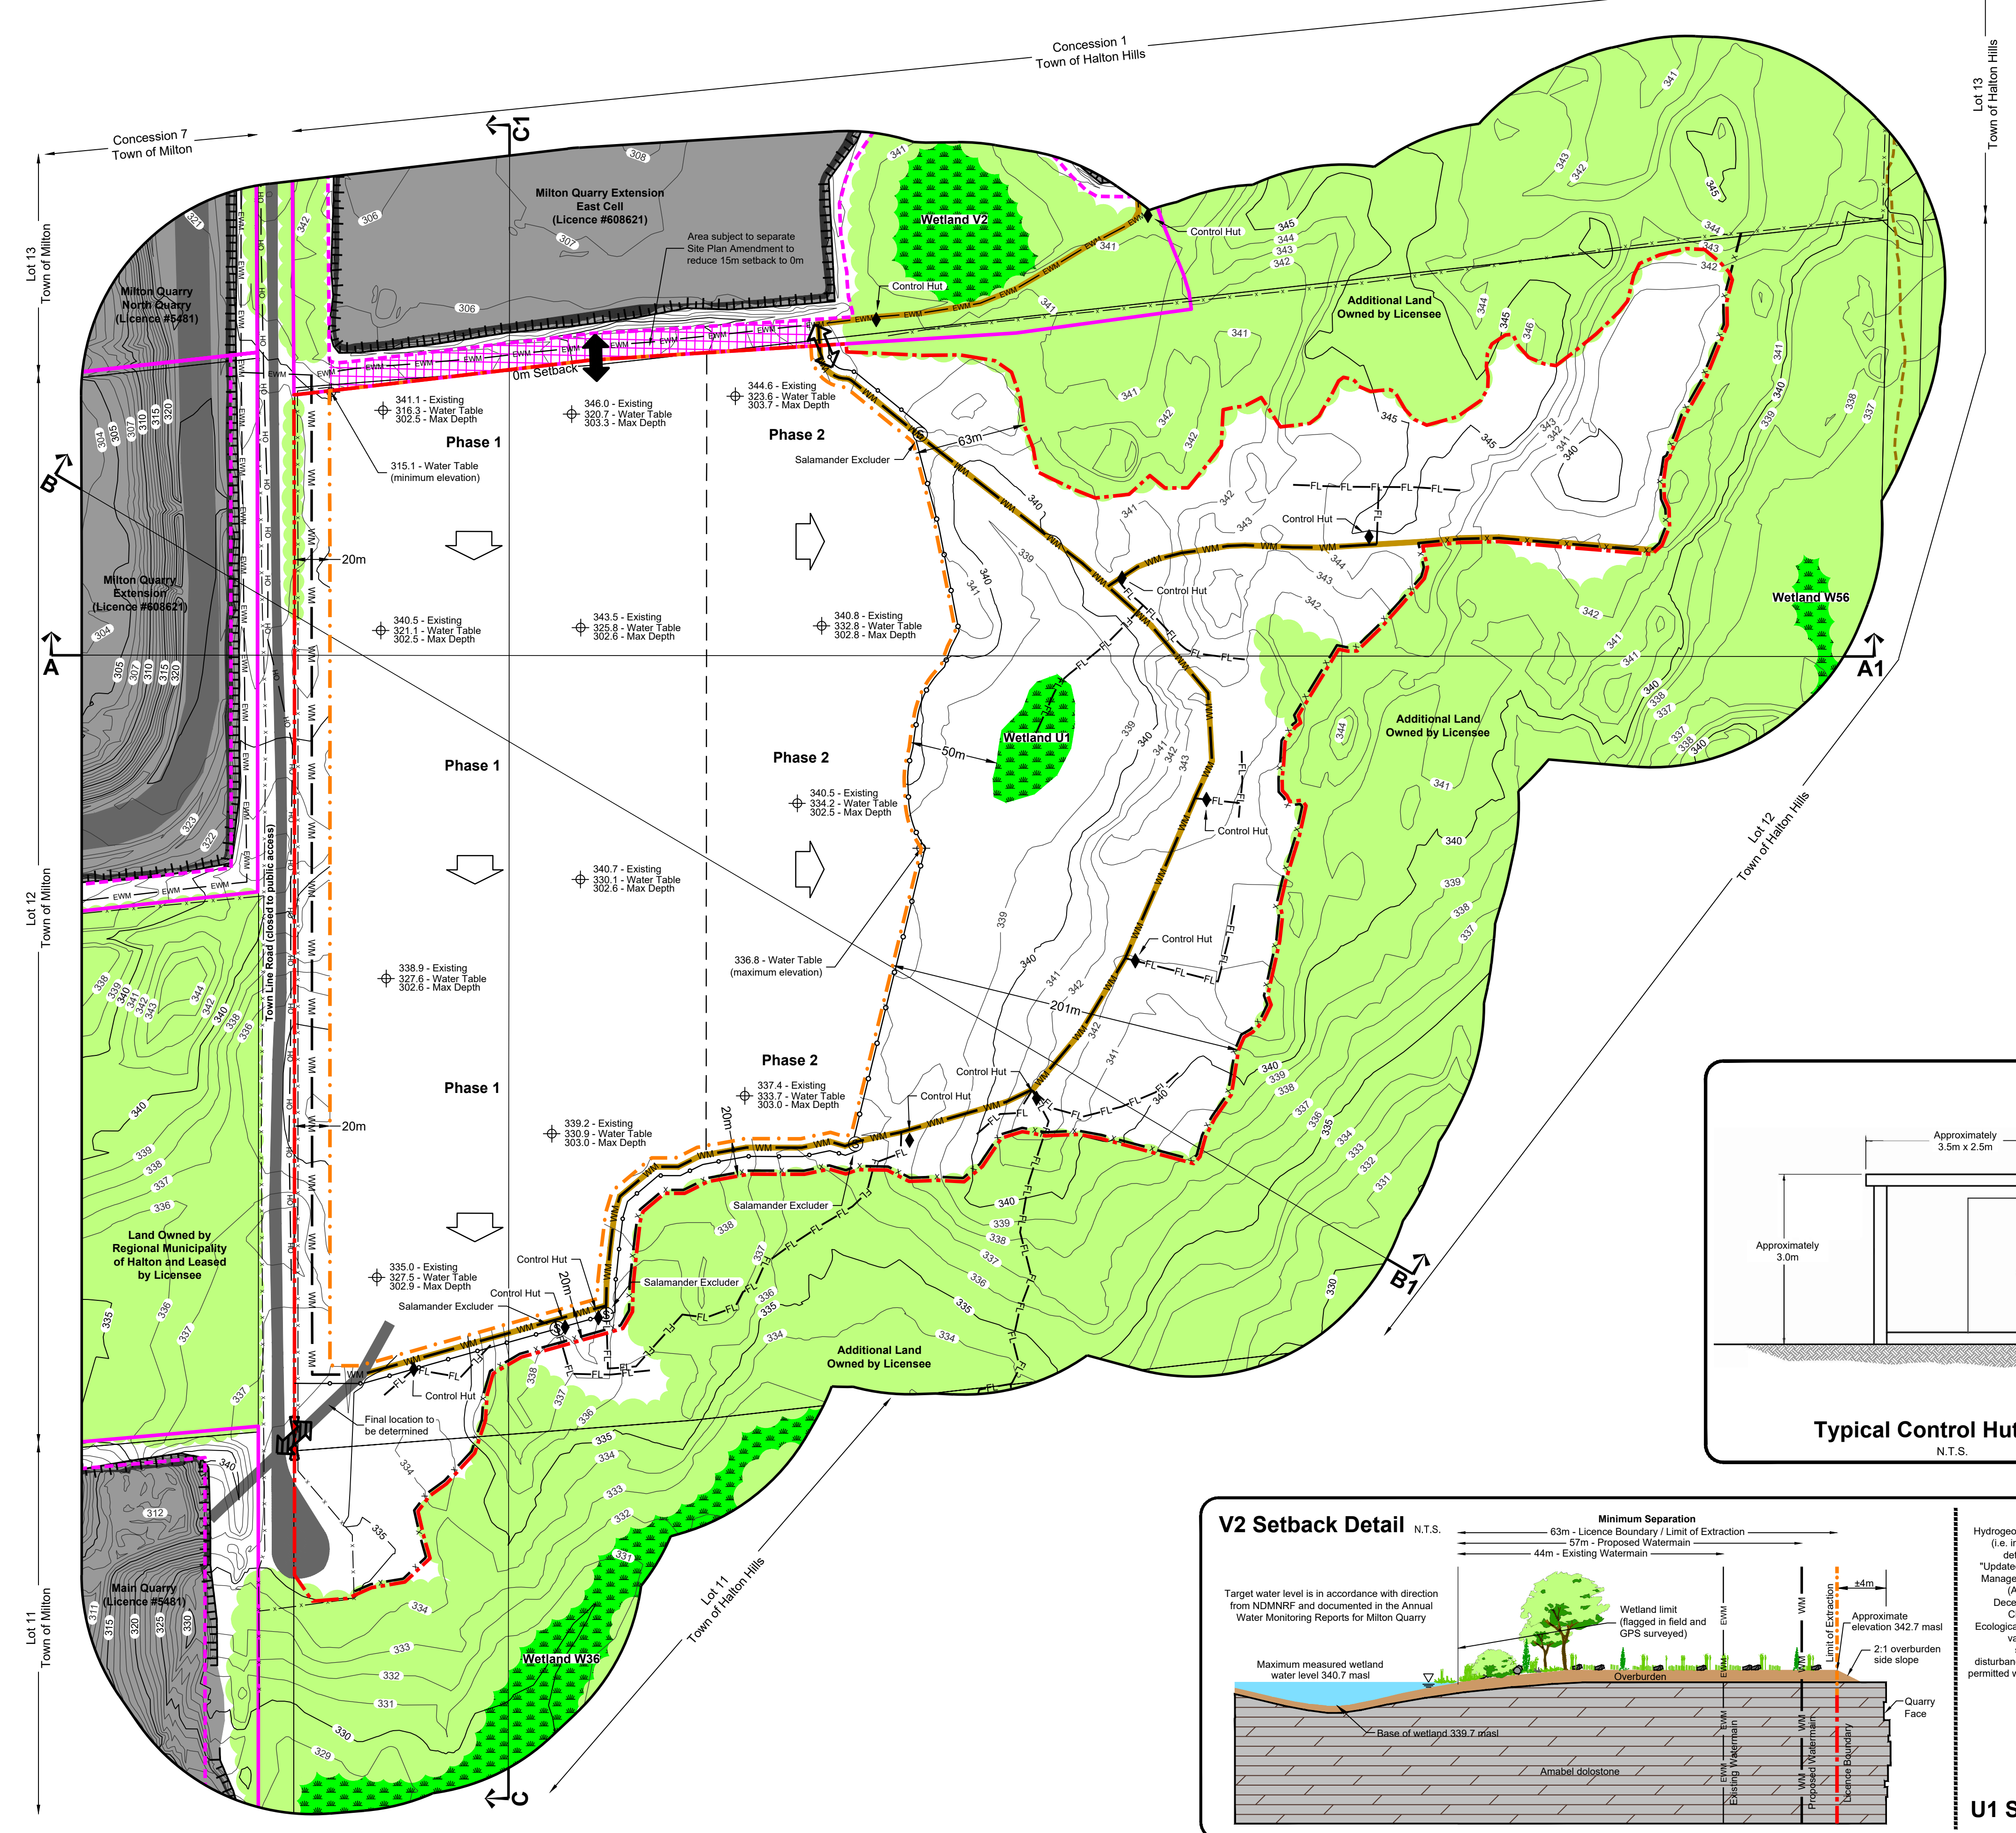

**Site Plan Acronyms**

- ARA - Aggregate Resource Act
- NDMNRFP - Ministry of Northern Development, Mines, Natural Resources and Forestry
- MHTSCI - Ministry of Heritage, Sport, Tourism and Culture Industries
- MGCS - Ministry of Government and Consumer Services
- MECP - Ministry of the Environment, Conservation and Parks
- AMP - Adaptive Environmental Management and Protection Plan
- ANSI - Area of Natural and Scientific Interest
- ESA - Environmentally Sensitive Area
- OWRA - Ontario Water Resources Act
- MQUE - Milton Quarry East Extension
- EEP - Ecological Enhancement Plan
- WMS - Water Management System
- MASL - Metres above mean sea level
- PTTW - Permit to Take Water

**Site Plan Amendments**

No.	Date	Description	By
1	January 2022	Update Natural Environment note E.12.b.1; per feedback from NDMNRFP	CAP

**Site Plan Revisions (Pre-Licensing)**

No.	Date	Description	By
1	January 2022	Update Natural Environment note E.12.b.1; per feedback from NDMNRFP	CAP

**MHBC PLANNING URBAN DESIGN & LANDSCAPE ARCHITECTURE**  
 113 COLLEGE STREET, BARRE, ON, L4M 1H2 | P: 570.728.0410 F: 709.728.0110 | WWW.MHBCON.COM

**MHBC Stamp**  
 Brian Zeman  
 Is authorized by the Ministry of Northern Development, Mines, Natural Resources and Forestry pursuant to Subsection 2(3)(9) of Ontario Regulation 244/97 to prepare and certify site plans.

**MHBC Stamp**  
 Christopher Poole  
 Is authorized by the Ministry of Northern Development, Mines, Natural Resources and Forestry pursuant to Subsection 2(3)(9) of Ontario Regulation 244/97 to prepare and certify site plans.

**Applicant**  
**Dufferin Aggregates**  
 A Division of CRH Canada Group Inc.  
 2300 Steele's Avenue West, 4th Floor  
 Concord, Ontario  
 L4K 5X6

**Project**  
**Milton Quarry East Extension**  
 10305 Nassagoyea Esquing Townline, Halton Hills, Ontario

**NDMNRFP Licence Reference No.** \_\_\_\_\_ **Applicant's Signature**  
 \_\_\_\_\_

**Plan Scale:** 1:2000 (Arch E) **Date:** December 2021

**Drawn By:** C.P. **File No.:** 9061DJ

**Checked By:** B.Z.



**File Name:** **Operational Plan**

**Drawing No.:** **2 of 4**

**File Path:** N:\9061DJ\_Dufferin - Milton Quarry East Extension\Drawings - Must be in NAD 27/50m Plan\CAD\9061DJ - Site Plan - January 2022.rvt

Table 1: Milton Quarry East Extension - Ecological Enhancement Plan (EEP) Unit Summary. A detailed table listing 106 EEP units (D41 to WE1) with columns for Unit#, Area (ha), Site Conditions, Woody Species Planting List, Year(s), Purpose, Other Management Activities, and Notes. The units are categorized by habitat type such as Wetland V6, Wetland V5, Wetland V4, Wetland V3, Wetland V2, Wetland V1, and various Wooded Areas.

Table 2: Milton Quarry East Extension - Rehabilitation Plan Unit Summary. A detailed table listing 16 rehabilitation units (TR-B1 to TR-B16) with columns for Unit#, Area (ha), Feature, Plant List, Purpose, Other Management Activities, and Notes. These units focus on revegetation and habitat restoration for various wetland areas.

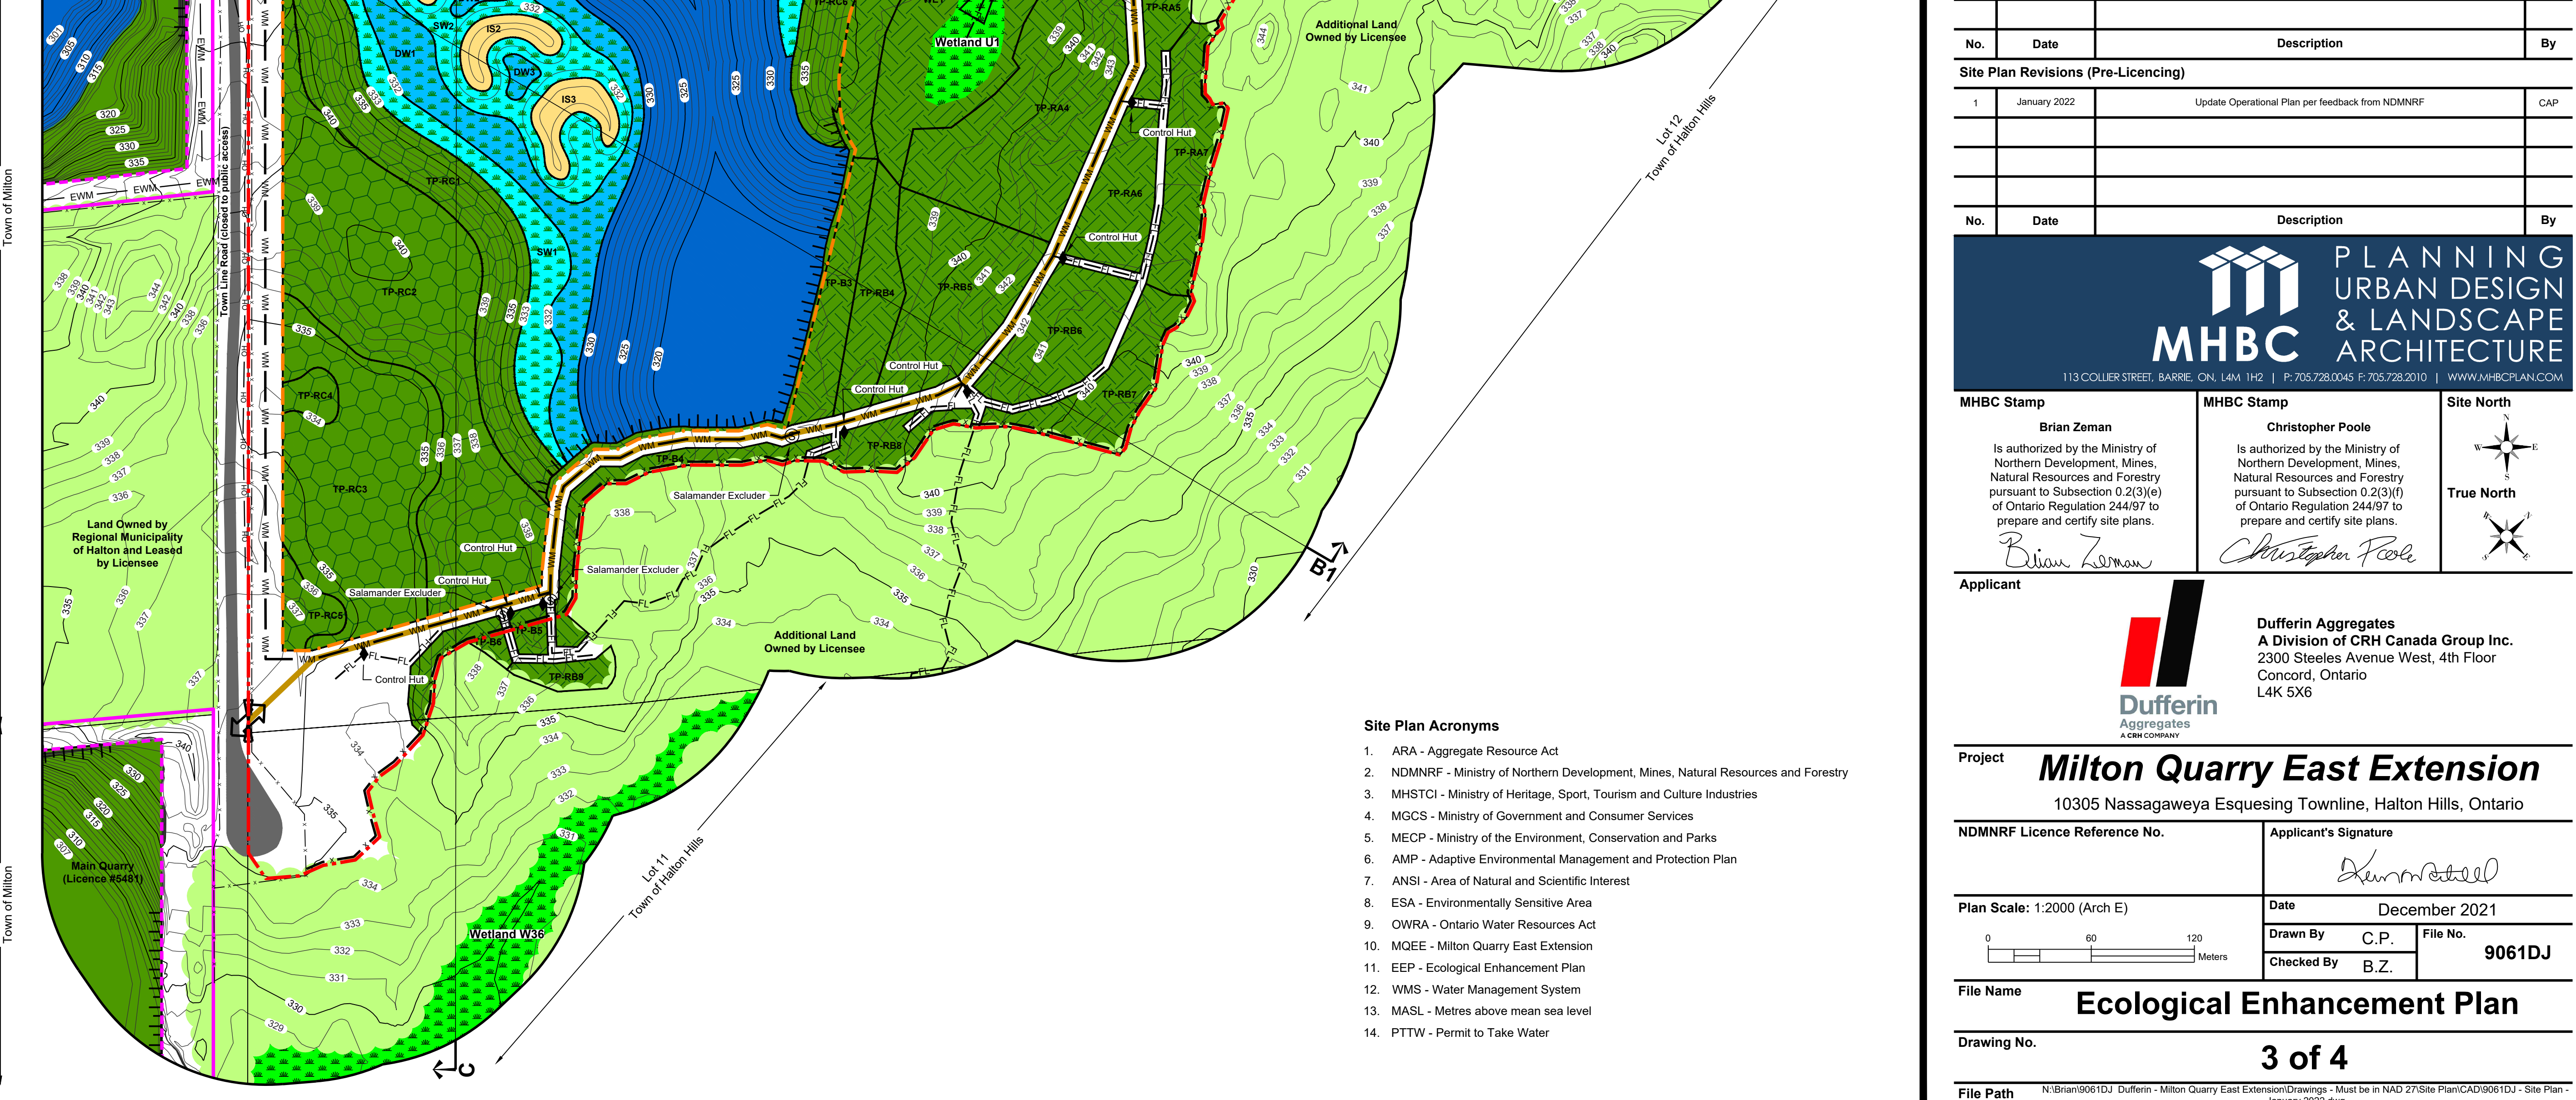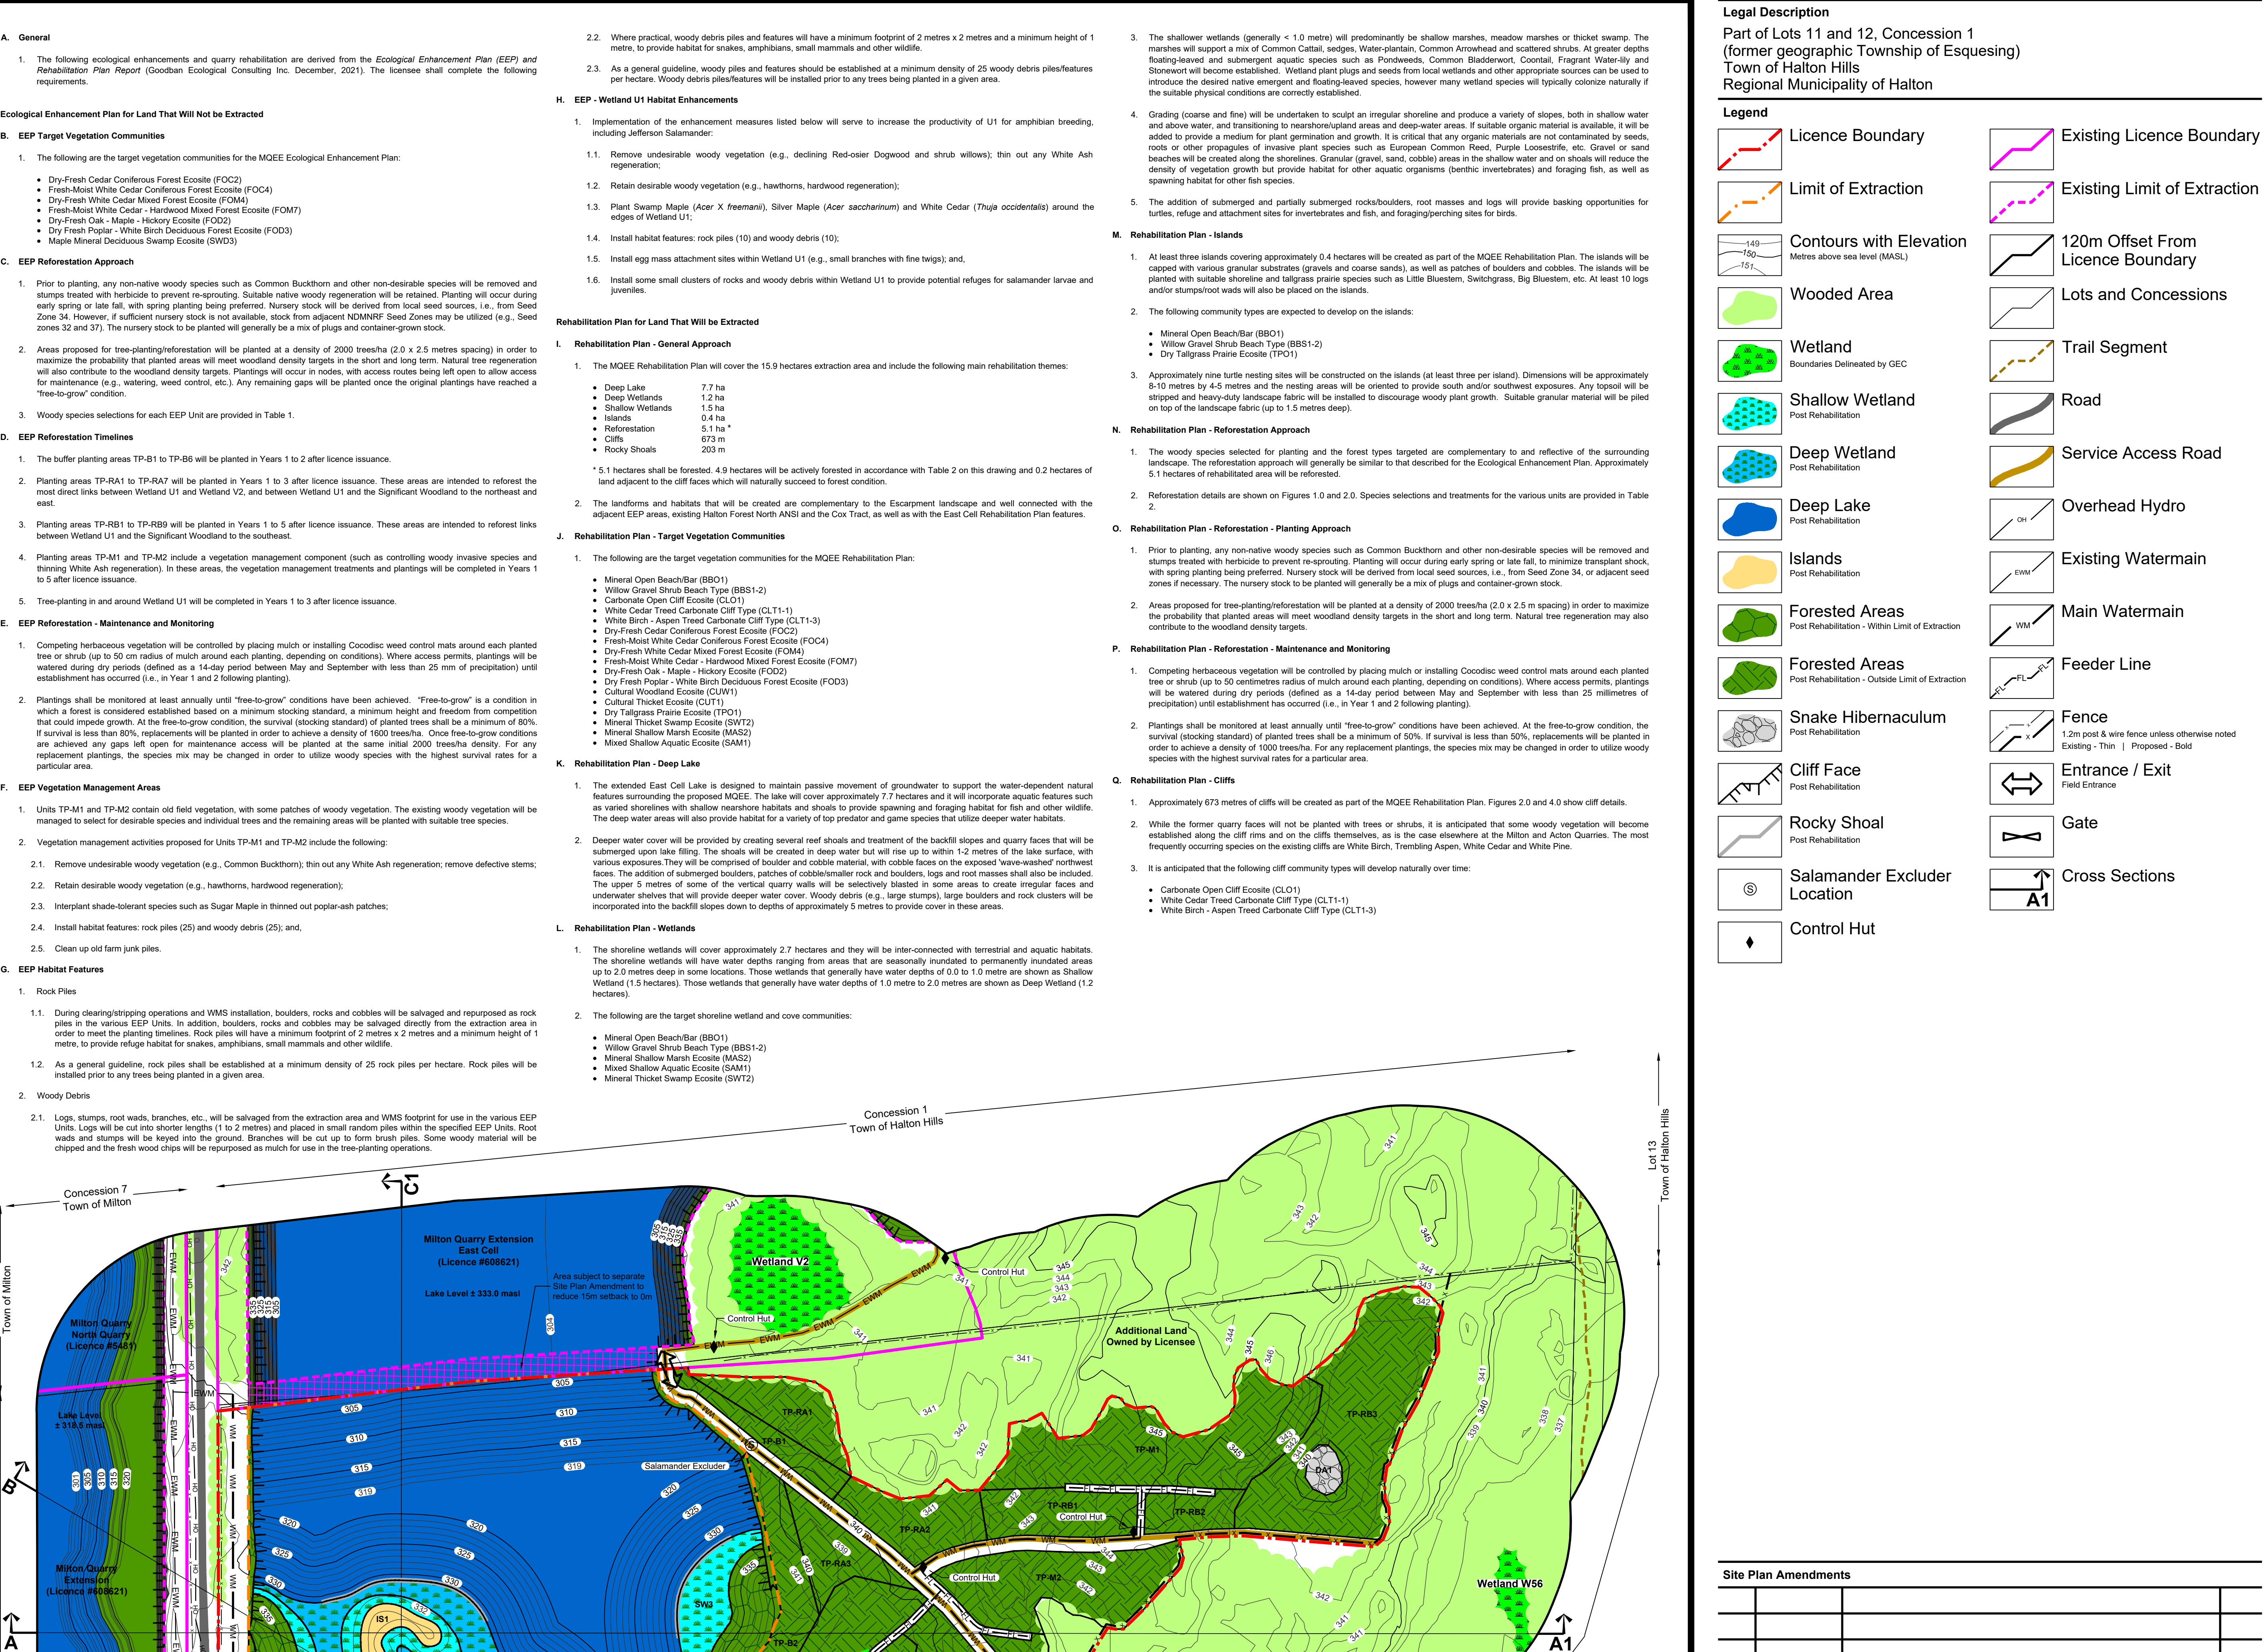

Legend and Key symbols. A table defining various symbols used in the site plan, including Licence Boundary, Limit of Extraction, Contours with Elevation, Wooded Area, Wetland, Shallow Wetland, Deep Wetland, Deep Lake, Islands, Forested Areas, Snake Hibiscium, Cliff Face, Rocky Shoal, Salamander Excluder Location, Control Hut, Existing Licence Boundary, Existing Limit of Extraction, 120m Offset From Licence Boundary, Lots and Concessions, Trail Segment, Road, Service Access Road, Overhead Hydro, Existing Watermain, Main Watermain, Feeder Line, Fence, Entrance / Exit, Gate, and Cross Sections.

Site Plan Amendments. A table with columns for No., Date, Description, and By. It lists amendments to the site plan.

No.	Date	Description	By
1	January 2022	Update Operational Plan per feedback from NDNRFF	CBP

Site Plan Revisions (Pre-Licensing). A table with columns for No., Date, Description, and By. It lists revisions to the site plan before licensing.

No.	Date	Description	By
-----	------	-------------	----

MHBC Stamp and signature block. Includes the MHBC logo, the name of the Applicant (Brian Zeman), the name of the Applicant's representative (Christopher Poole), and the MHBC stamp details.

Project Information and Applicant Details. Includes the project name 'Milton Quarry East Extension', the address '10305 Nassagaweya Esquewing Townline, Halton Hills, Ontario', the NDNRFF Licence Reference No., the Applicant's name 'Dufferin Aggregates', and the Applicant's representative 'Christopher Poole'. It also includes the Plan Scale (1:2000 Arch E), the Date (December 2021), and the File No. (9061DJ).

A. General

- The following ecological enhancements and quarry rehabilitation are derived from the Ecological Enhancement Plan (EEP) and Rehabilitation Plan Report (Goodman Ecological Consulting Inc. December, 2021). The licensee shall complete the following requirements.

B. EEP Target Vegetation Communities

- 1. The following are the target vegetation communities for the MGEI Ecological Enhancement Plan:

- Dry-Fresh Oak-Maple Forest Ecotype (F02C)
- Fresh Moist White Cedar Coniferous Forest Ecotype (FC0A)
- Dry-Fresh White Cedar Mixed Forest Ecotype (FM0A)
- Dry-Fresh White Cedar Mixed Forest Ecotype (FM0B)
- Dry-Fresh Oak-Maple-Hickory Ecotype (F02D)
- Dry-Fresh Oak-Maple-Hickory Ecotype (F02E)
- Maple-Mineral Deposited Swampy Ecotype (S02C)

C. EEP Restoration Approach

- 1. Prior to planting, any non-native woody species such as Common Buckthorn and other non-desirable species will be removed and stumps treated with herbicide to prevent sprouting.

D. EEP Restoration Timing

- 1. The buffer planting areas TP-B1 to TP-B6 will be planted in Years 1 to 2 after licence issuance.

E. EEP Restoration - Maintenance and Monitoring

- 1. Complete herbaceous vegetation will be controlled by mowing or hand pulling. Weeds control must include any planted trees or shrubs up to 20 metres of radius around each planting, depending on conditions.

F. EEP Restoration - Planting Approach

- 1. The extended EEP Unit C4 is designed to maintain passive protection of groundwater to support the water-dependent natural features surrounding the proposed MGEI.

G. EEP Restoration - Maintenance and Monitoring

- 1. Comparing herbaceous vegetation will be controlled by mowing or installing Coccolite weed control mats around each planted area.

H. Rehabilitation Plan - Deep Lake

- 1. The extended EEP Unit C6 is designed to maintain passive protection of groundwater to support the water-dependent natural features surrounding the proposed MGEI.

I. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

J. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

K. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

L. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

M. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

N. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

O. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

P. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

Q. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

R. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

S. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

T. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

U. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

V. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

W. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

X. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

Y. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

Z. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AA. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AB. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AC. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AD. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AE. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AF. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AG. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AH. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AI. Rehabilitation Plan - Wetlands


- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AJ. Rehabilitation Plan - Wetlands

- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

AK. Rehabilitation Plan - Wetlands


- 1. The shoreline wetlands will have water depths ranging from 1 to 2 metres and they will be interconnected with perennial aquatic habitats.

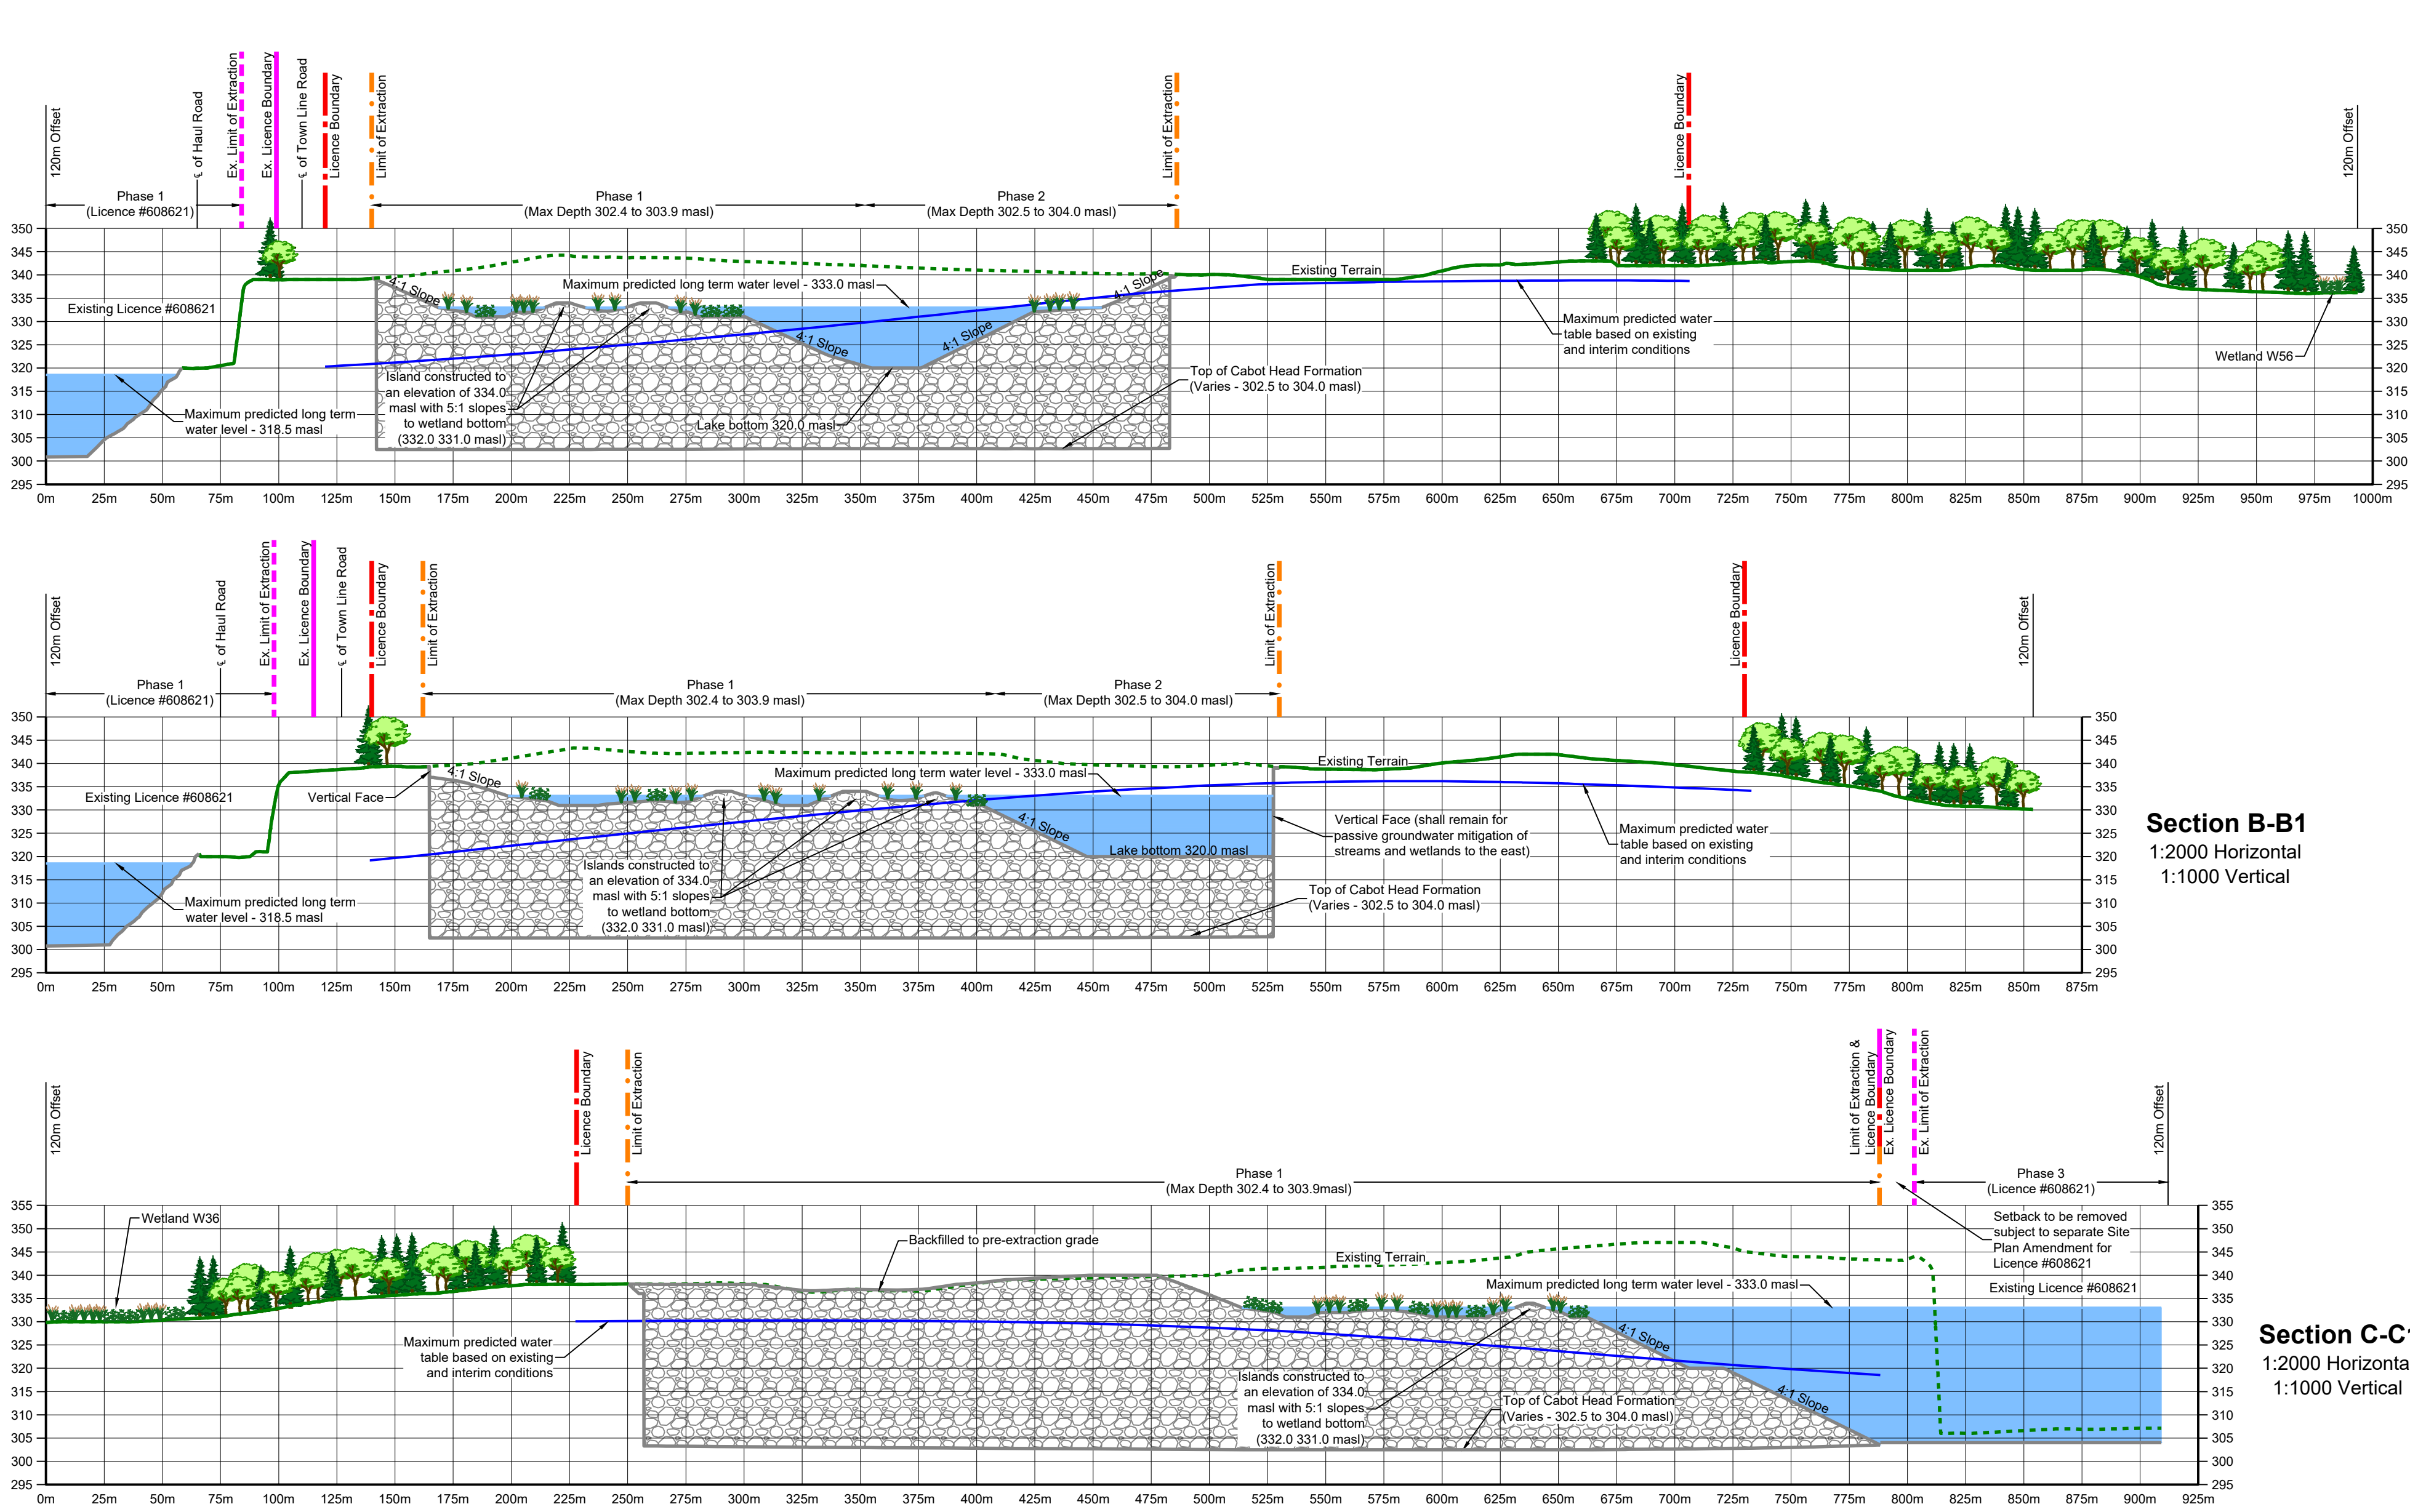

Section A-A1  
1:2000 Horizontal  
1:1000 Vertical

Section B-B1  
1:2000 Horizontal  
1:1000 Vertical

Section C-C1  
1:2000 Horizontal  
1:1000 Vertical

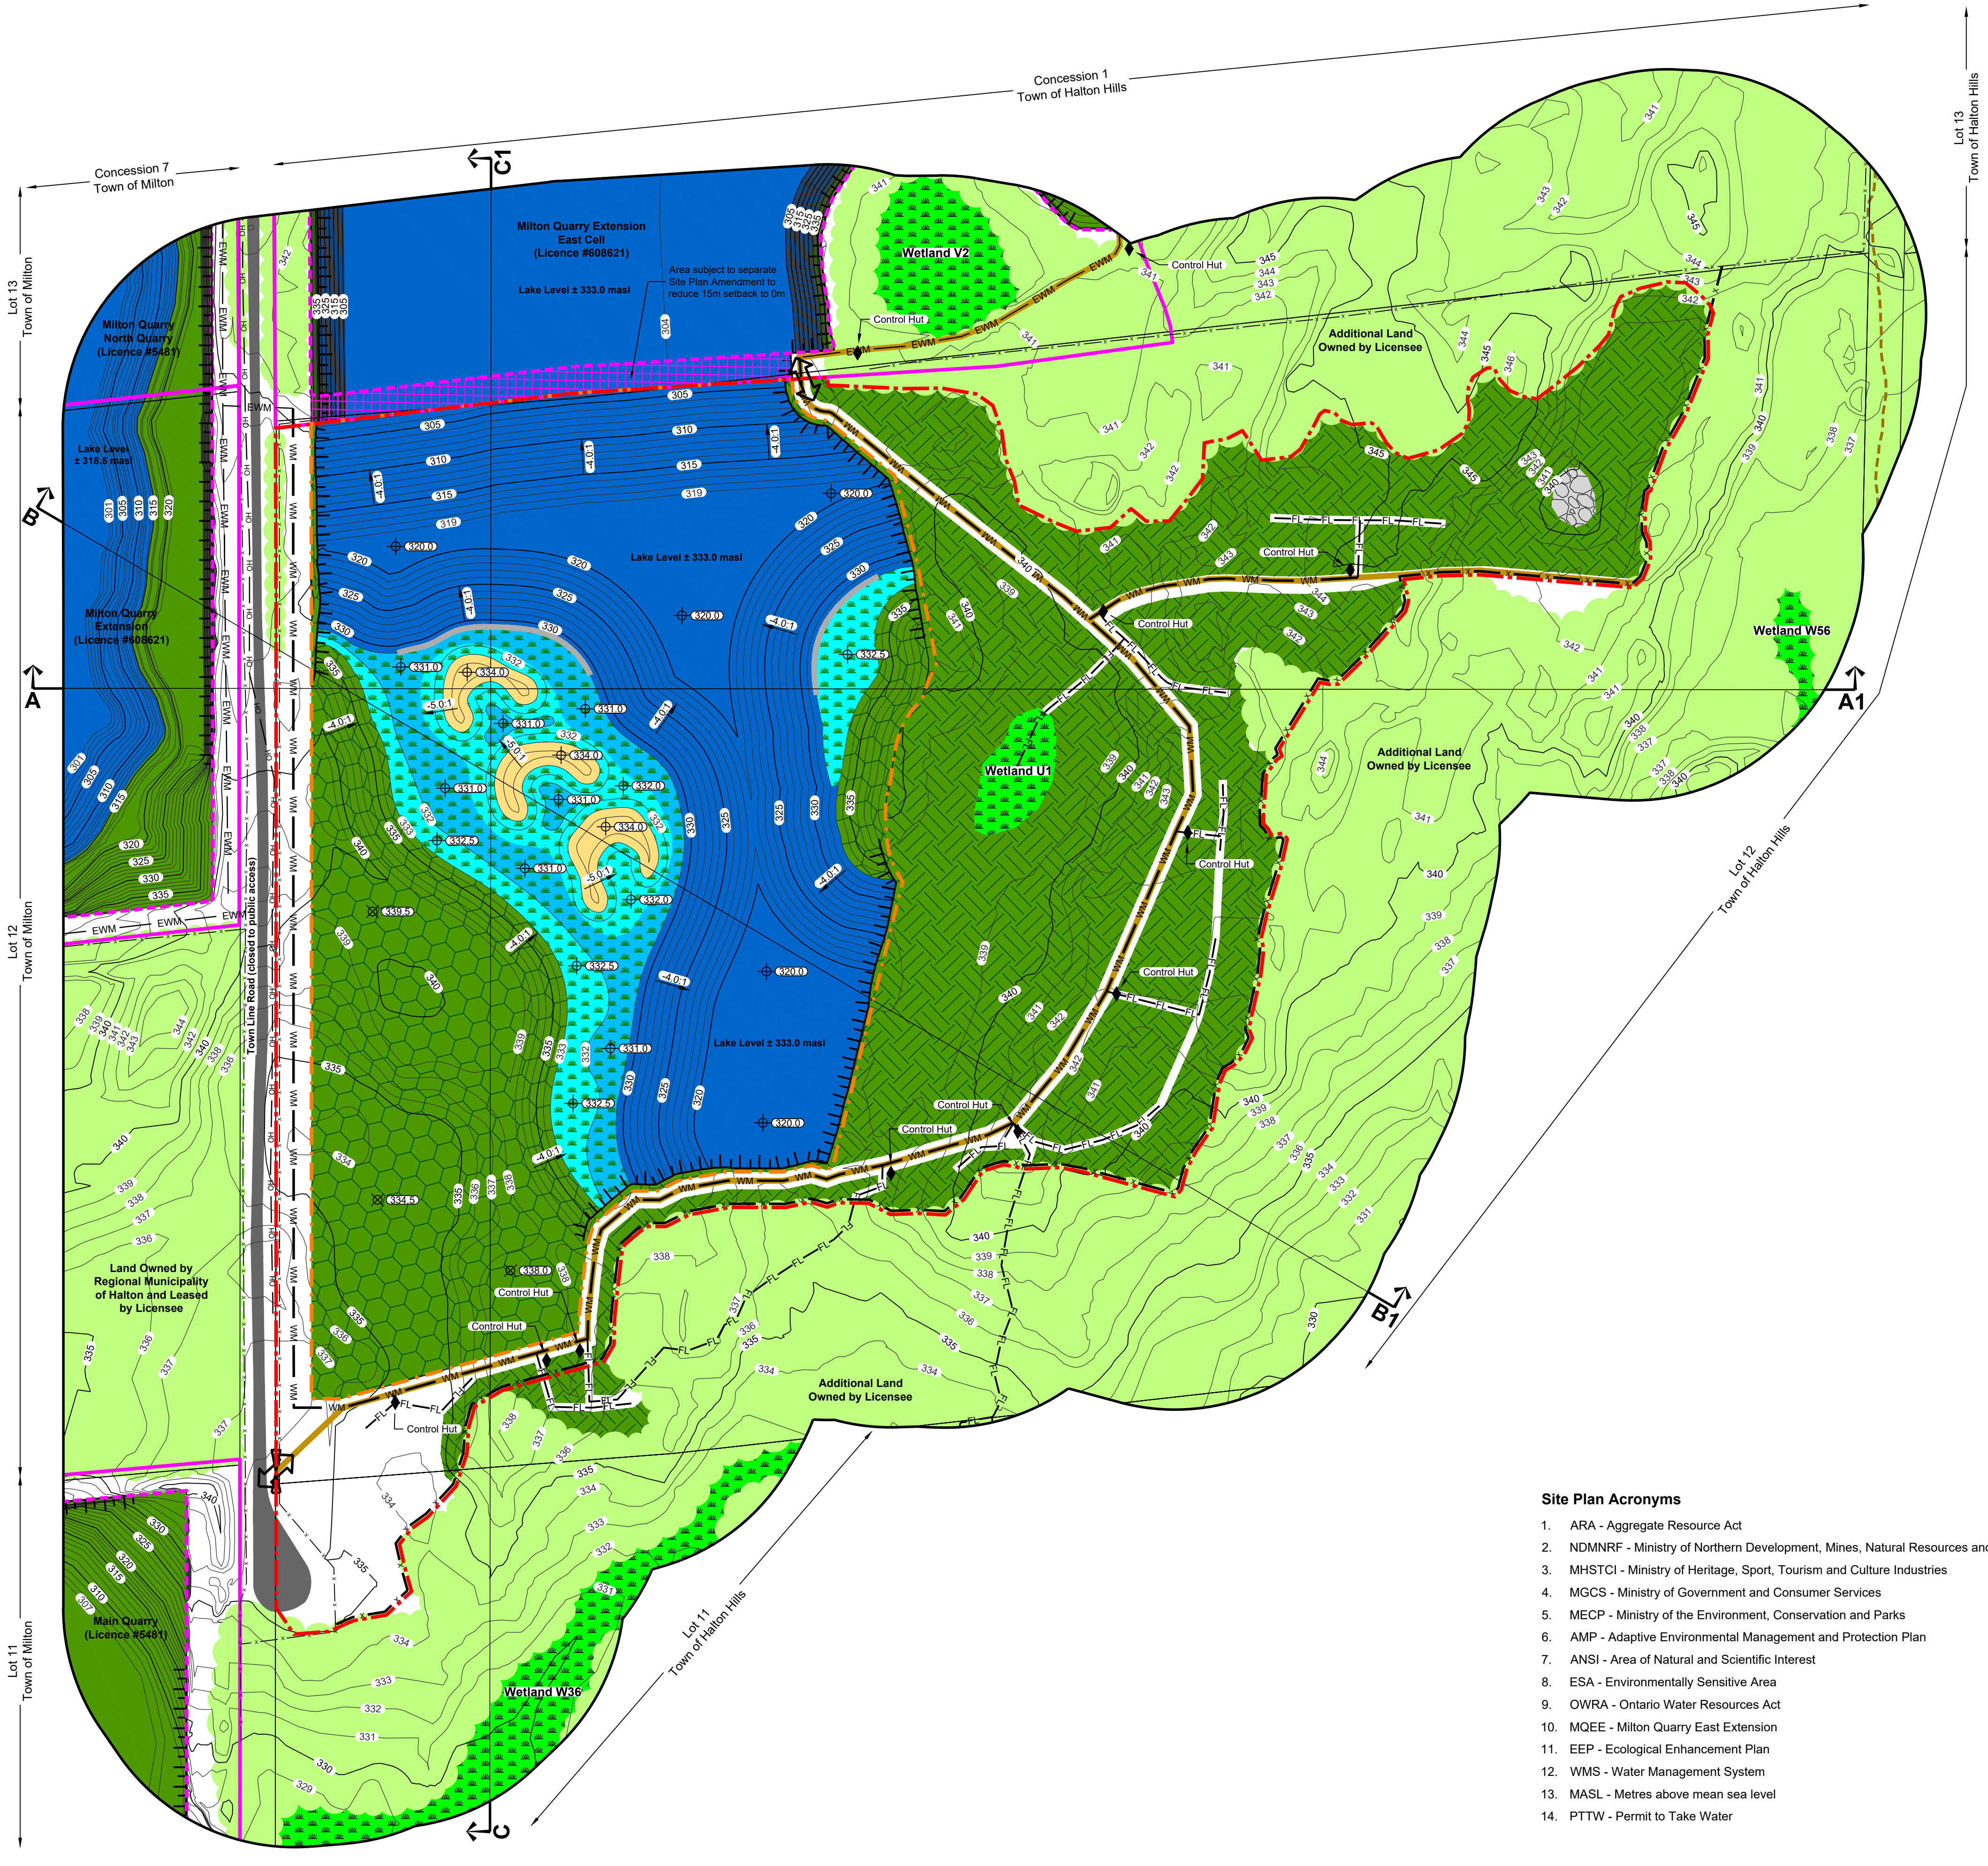

- Site Plan Acronyms**
- ARA - Aggregate Resources Act
  - NDMRRF - Ministry of Northern Development, Mines, Natural Resources and Forestry
  - MHTCI - Ministry of Heritage, Sport, Tourism and Culture Industries
  - MCCS - Ministry of Government and Consumer Services
  - MECP - Ministry of the Environment, Conservation and Parks
  - AMP - Adaptive Environmental Management and Protection Plan
  - ANSI - Area of Natural and Scientific Interest
  - ESA - Environmentally Sensitive Area
  - OWRA - Ontario Water Resources Act
  - MOEE - Milton Quarry East Extension
  - EEP - Ecological Enhancement Plan
  - WMS - Water Management System
  - MASL - Metres above mean sea level
  - PTTW - Permit to Take Water

- General Notes**
- Area Calculations:
    - Licence boundary 30.2 ha
    - Limit of Extraction 15.9 ha
  - Possible after uses may include:
    - Conservation
    - Passive recreation
    - Low intensity recreation
  - The licence will apply for surrender of the licence 1 year after the rehabilitation (with the exception of lake filling) and two post extraction 5 year reviews. Have been successfully completed.

- Rehabilitation Notes**
- Numbering scheme used for operational notes refers to Aggregate Resources of Ontario Site Plan Standards.
- The final rehabilitated landform of the site will consist of a lake, wetlands, islands, above/below water vertical extraction faces and terrestrial habitat (see drawing 3 of 4 for additional details regarding landform creation).
  - Progressive rehabilitation shall commence as limits of extraction are reached within each phase. Progressive rehabilitation will generally follow the direction and sequence of extraction identified on the plan view and described in the notes on drawing 2 of 4. Slight variations in the operational and rehabilitation sequence shall be permitted in order to adjust for any variable resource, variable market conditions, or for environmental mitigation requirements such as retaining contingency extraction areas. Any major variation from the operational and rehabilitation sequence shall require approval from the NDMRRF.
  - Topsoil and overburden shall be stripped, stored and/or placed separately wherever there are distinguishable layers and sufficient thickness to allow separate handling.
  - Topsoil and overburden materials may be transferred between this licence and Licence #5481 and #60261 (see Operational Note 64 - Variations from Control and Operation Standards on drawing 2 of 4). Topsoil and organic material shall be transported to areas being prepared for final rehabilitation and overburden material shall be used as structural material or general backfill to bring areas up to required finished grade.
  - Temporary stockpiling of topsoil or overburden may occur during transfer and replacement operations. Any stockpiles which remain for more than six months shall be graded and seeded to control erosion. Seeding shall not be required if these stockpiles have vegetated naturally in the six months.
  - Excess soil, as defined by Ontario Regulation 406/19 under the Environmental Protection Act and/or peat may be imported to the site for the following rehabilitation purpose:
    - To establish the slopes, grades and elevations depicted on the plan view

- Excess soil will be accepted in accordance with the "Milton Quarry Off-site Excess Soil Acceptance Protocol". This protocol shall be filed with NDMRRF prior to acceptance of any off-site soil.
- The maximum amount of excess soil that may be imported to this licence for rehabilitation purposes is 3,850,000 m<sup>3</sup>.
- Vegetation shall be re-established within the limit of extraction during progressive and final rehabilitation in accordance with the planting details provided on drawing 3 of 4.

- In order to establish the final rehabilitated landform proposed on the plan view, a variety of rehabilitation techniques will be utilized including:
    - Backfilling extraction faces and the quarry floor;
    - Partially backfilling extraction faces to create cliffs; or
    - Leaving extraction faces vertical
- Figures 1 to 4 below provide additional information for the rehabilitation techniques.

The wetlands, islands, and terrestrial habitat areas shall be backfilled using on-site overburden and non-marketable materials from this site or adjacent Licence #60821 (see Operational Note 64 - Variations from Control and Operation Standards on drawing 2 of 4) as well as excess soils in accordance with note 62 on this drawing.

The objective is to integrate wetlands, islands, terrestrial habitat and irregular vertical faces (with shell areas and habitat niches) around the perimeter of the lake (as depicted on the plan view). This will establish a more diverse landscape with a range of flora and fauna habitats.

Additional planting details are provided on drawing 3 of 4.

- No buildings shall remain on site except for those associated with the recharge mitigation system (e.g. control huts) which will be maintained in accordance with applicable OVRAs permits to manage the proposed lake level.
- No internal haul roads shall remain on-site. Service access roads shall remain to access the watermain and associated facilities.

- Final surface drainage will follow the rehabilitated contours and directional arrows shown on the plan view. Drainage shall be directed towards the lake and wetlands.
- The final predicted water table on-site post extraction is at an elevation of 333.0 msl. The maximum predicted water table elevation is based on existing and interim conditions and is shown in each cross section on this drawing and drawing 1 of 4.

Operation of the mitigation system and associated monitoring as outlined in the AMP shall be continued during the rehabilitation period. The water levels of the proposed lake and rate of lake filling shall be evaluated five years after extraction is complete to refine the appropriate final elevations for the development of the shoreline and associated wetland features. These features shall be finalized and appropriate shoreline vegetation shall be completed during the subsequent five year evaluation period. These two five year reviews shall be completed prior to the surrender of the licence and include an overall evaluation of the performance of the mitigation measures to confirm the objectives are being achieved and the operation is sustainable over the long-term as described in the AMP.

- The final rehabilitated landform is illustrated by one metre contours on the plan view.
- Not applicable since this is not a Class B licence.

- Cross Section Notes**
- Cross section locations are identified on the plan view for each drawing.
  - The horizontal scale is 1:2000 while the vertical scale is 1:1000 for cross sections on this drawing and drawing 1 of 4.
  - Cross sections on drawing 1 of 4 depict the existing conditions while the cross sections on this drawing depict the final rehabilitation landform.
  - The maximum predicted water table based on existing and interim conditions is illustrated as a solid blue line on each cross section.

**Legal Description**  
Part of Lots 11 and 12, Concession 1 (former geographic Township of Esquesing) Town of Halton Hills Regional Municipality of Halton

**Legend**

	Licence Boundary		Existing Licence Boundary
	Limit of Extraction		Existing Limit of Extraction
	Contours with Elevation Metres above sea level (MASL)		120m Offset From Licence Boundary
	Wooded Area		Lots and Concessions
	Wetland Boundaries Delineated by GEC		Trail Segment
	Shallow Wetland Post Rehabilitation		Road
	Deep Wetland Post Rehabilitation		Service Access Road
	Deep Lake Post Rehabilitation		Overhead Hydro
	Islands Post Rehabilitation		Existing Watermain
	Forested Areas Post Rehabilitation - Within Limit of Extraction		Main Watermain
	Forested Areas Post Rehabilitation - Outside Limit of Extraction		Feeder Line
	Snake Hibernaculum Post Rehabilitation		Fence 1.2m post & wire fence unless otherwise noted Existing - Thin   Proposed - Bold
	Cliff Face Post Rehabilitation		Entrance / Exit Post Entrance
	Rocky Shoal Post Rehabilitation		Gate
	Control Hut		Proposed Floor Elevation Metres above mean sea level (MASL)
			Proposed Final Grade (Horizontal - Vertical)
			Cross Sections

**Legend - Cross Sections**

	Licence Boundary		Maximum Predicted Water Table - based on existing and interim conditions
	Limit of Extraction		Quarry Floor / Face
	Existing Licence Boundary		Backfilled
	Existing Limit of Extraction		Lake or Pond
	Existing Grade (Removed / Altered)		
	Existing Grade (Undisturbed)		

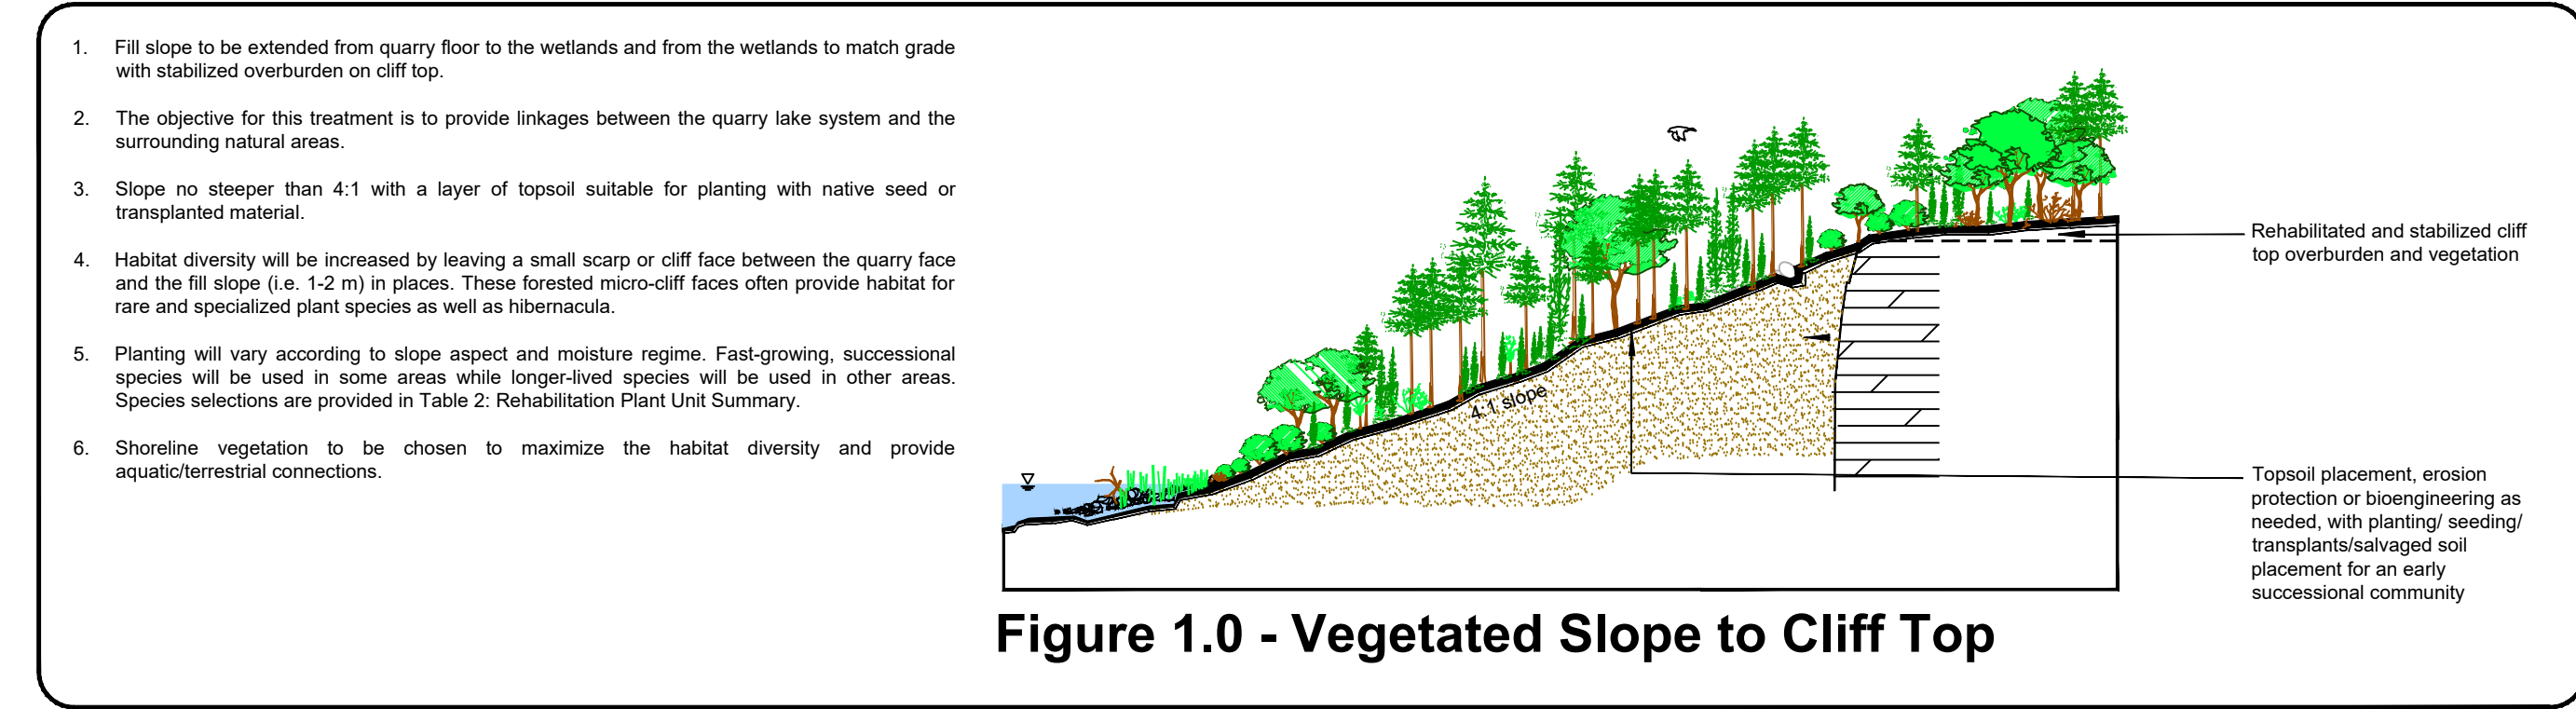


Figure 1.0 - Vegetated Slope to Cliff Top

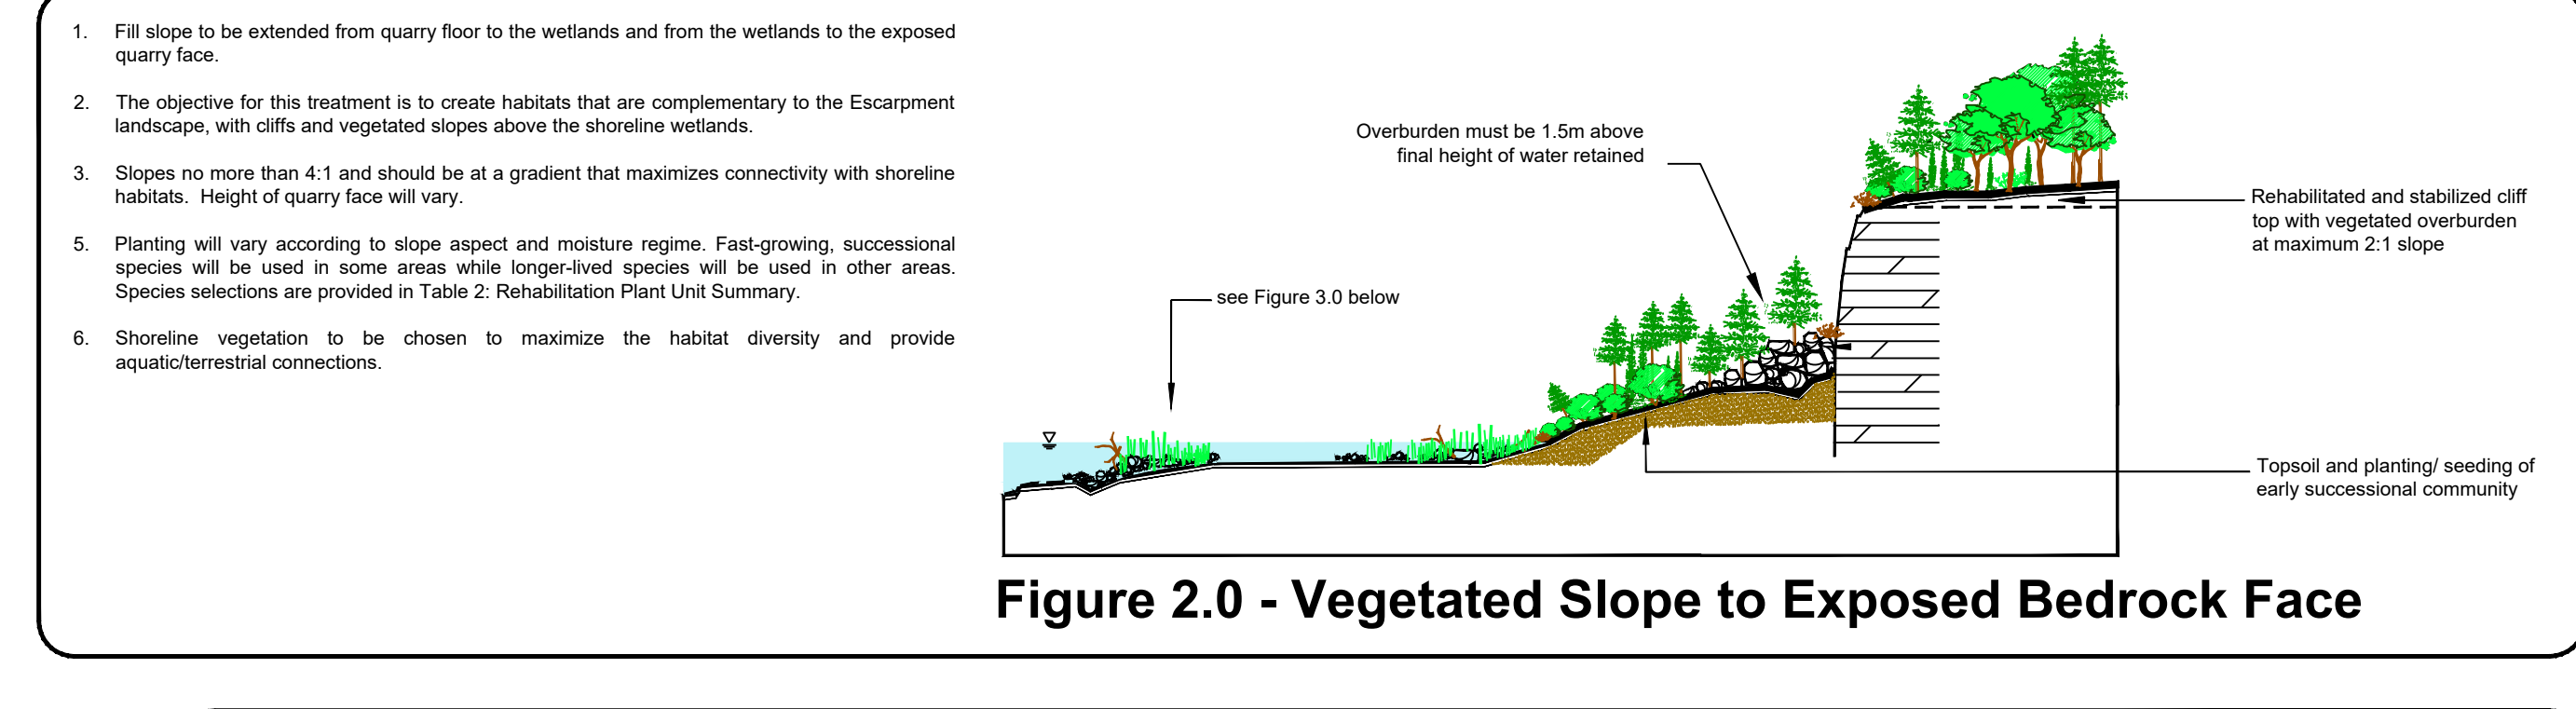


Figure 2.0 - Vegetated Slope to Exposed Bedrock Face

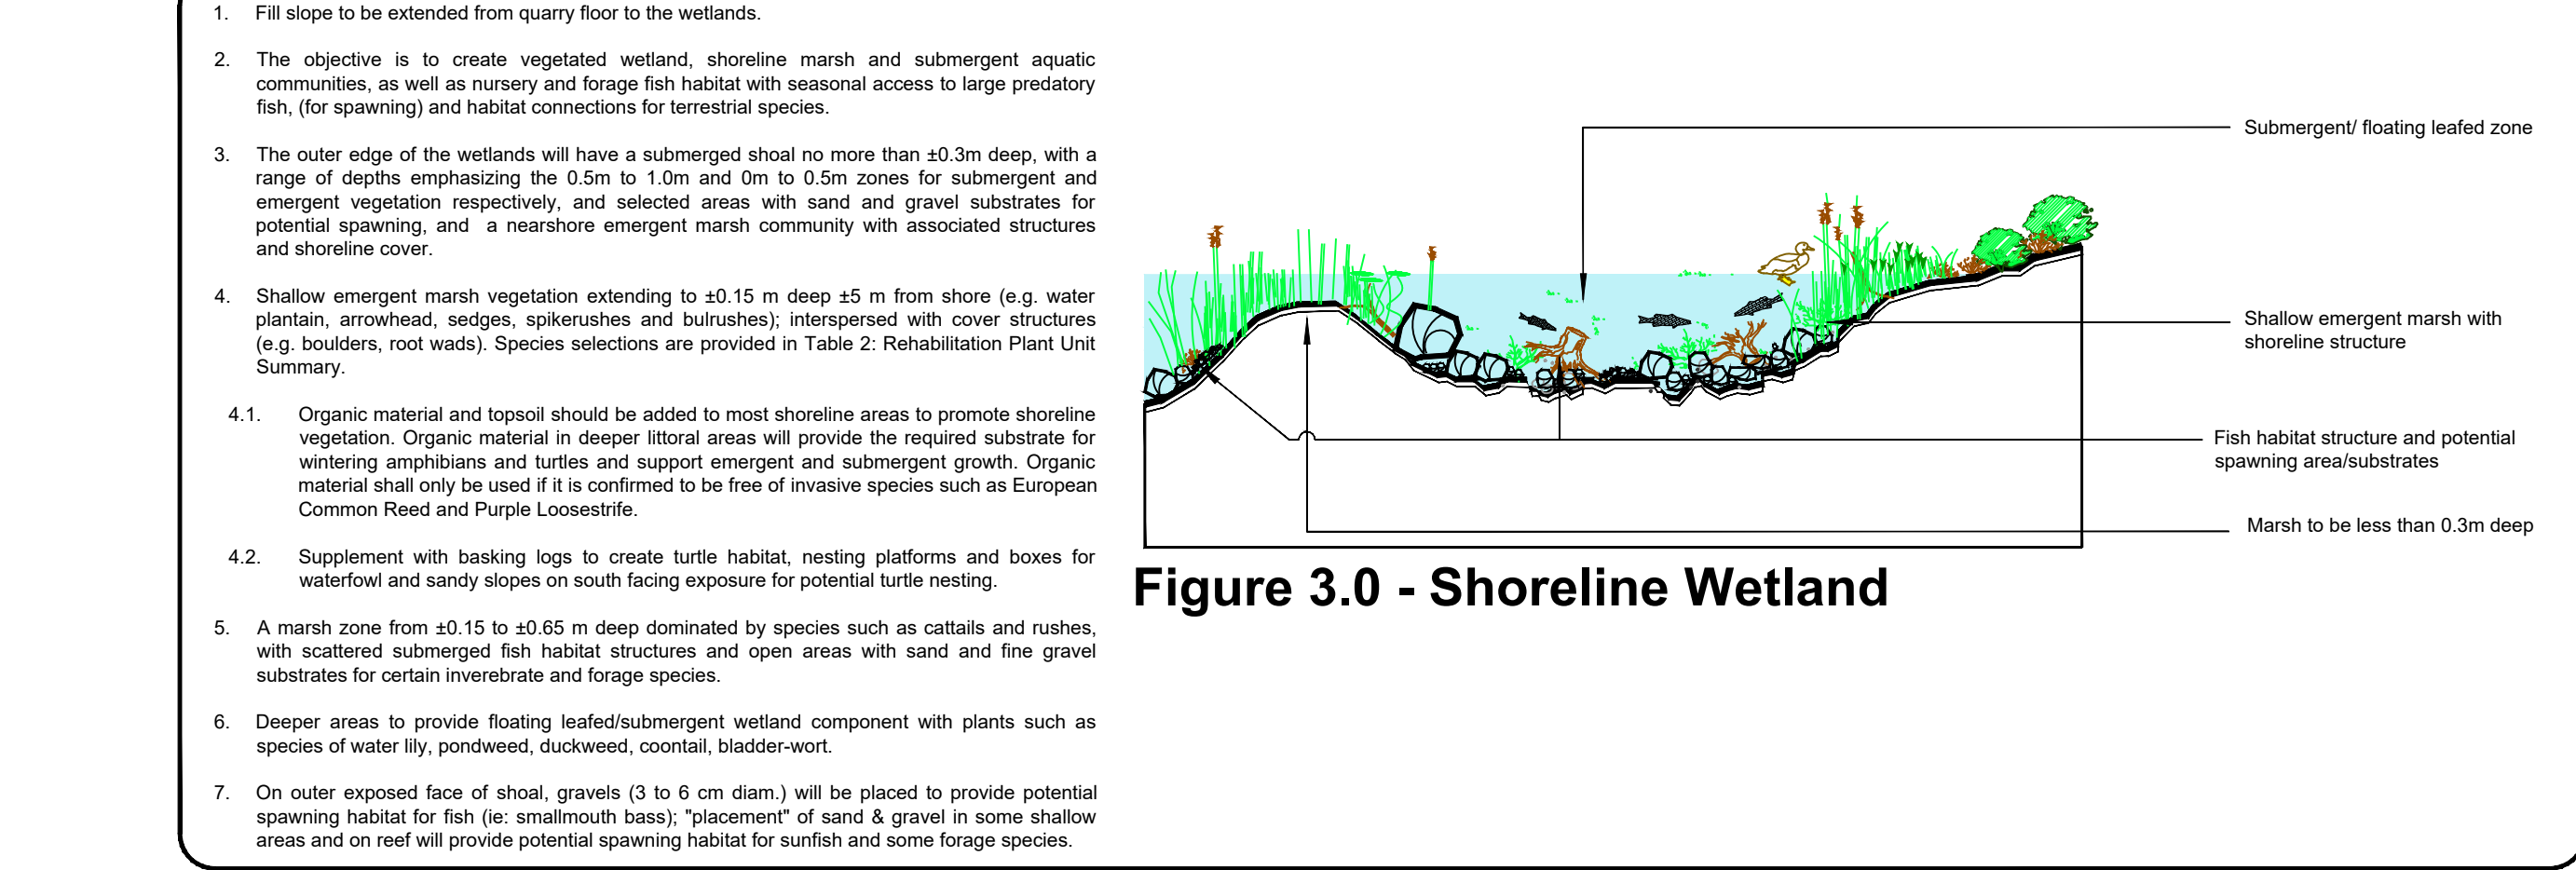


Figure 3.0 - Shoreline Wetland

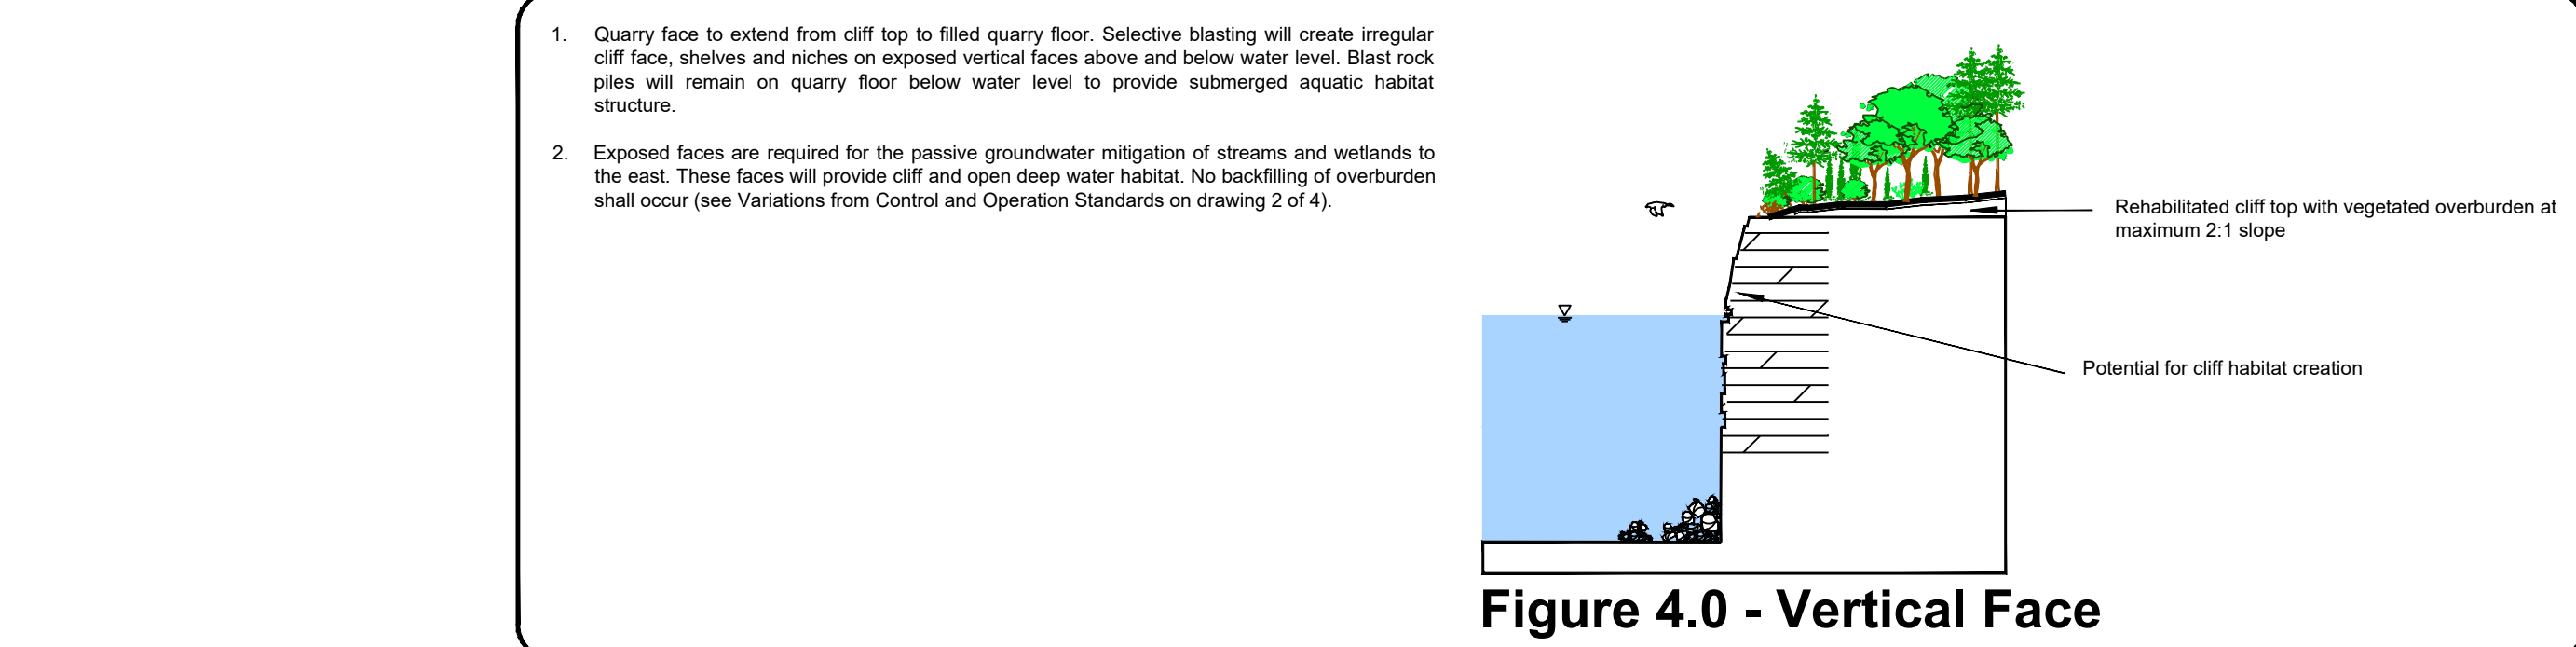


Figure 4.0 - Vertical Face

**Site Plan Amendments**

No.	Date	Description	By

**Site Plan Revisions (Pre-Licensing)**

No.	Date	Description	By
1	January 2022	Update Operational Plan per feedback from NDMRRF	CAP

**MHBC Stamp**

**Brian Zeman**  
Is authorized by the Ministry of Northern Development, Mines, Natural Resources and Forestry pursuant to Subsection 0.2(3)(9) of Ontario Regulation 244/97 to prepare and certify site plans.

**Christopher Poole**  
Is authorized by the Ministry of Northern Development, Mines, Natural Resources and Forestry pursuant to Subsection 0.2(3)(9) of Ontario Regulation 244/97 to prepare and certify site plans.

**Site North**  
True North

**Applicant**  
Dufferin Aggregates  
A Division of CRH Canada Group Inc.  
2300 Steeles Avenue West, 4th Floor  
Concord, Ontario  
L4K 5X6

**Project**  
**Milton Quarry East Extension**  
10305 Nassagaweya Esqueting Townline, Halton Hills, Ontario

**NDMRRF Licence Reference No.**  
9061DJ

**Applicant's Signature**

**Date**  
December 2021

**Plan Scale:** 1:2000 (Arch E)

**Drawn By:** C.P. **File No.:** 9061DJ

**Checked By:** B.Z.

**File Name**  
**Rehabilitation Plan**

**Drawing No.**  
**4 of 4**

**File Path**  
N:\9061DJ - Dufferin - Milton Quarry East Extension\Drawings - Must be in NAD 27/56 Plan\CAD\9061DJ - Site Plan - January 2022.dwg